


東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF8L-H-GX5 3/D700
光束	700 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

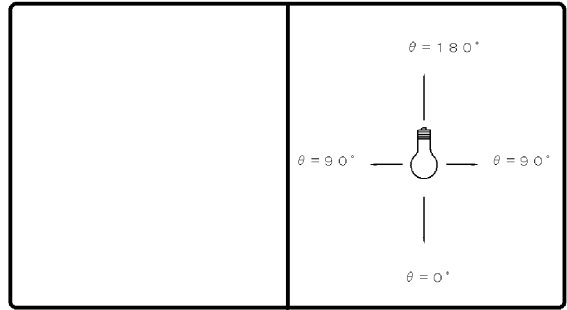

効 率	F		%
	F		%
	F	100	%
	器具 光束	700	lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	361		
10°	353		
20°	329		
30°	290		
40°	241		
50°	188		
60°	135		
70°	85		
80°	40		
90°	14		
100°	11		
110°	10		
120°	9		
130°	7		
140°	5		
150°	4		
160°	2		
170°	1		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	照明率 (×0.01)																																				
0.60	63	58	49	47	41	39	61	57	48	46	40	39	46	44	39	38	38	37	33	31																	
0.80	75	68	61	57	52	50	73	67	60	56	51	49	57	55	50	48	48	47	43	41																	
1.00	82	74	68	63	59	56	79	72	67	62	58	56	64	60	56	54	54	53	48	46																	
1.25	90	80	77	70	67	63	86	78	75	69	66	62	71	67	64	61	61	59	55	52																	
1.50	95	83	82	75	73	68	91	81	80	73	72	67	76	71	69	65	66	64	59	57																	
2.00	103	89	92	82	84	76	99	87	89	81	81	75	84	78	78	73	74	71	67	64																	
2.50	107	93	98	86	90	81	103	90	95	85	88	80	89	82	83	78	79	76	72	69																	
3.00	111	95	102	90	95	85	106	93	99	88	92	84	92	85	87	81	83	79	75	73																	
4.00	115	98	108	94	102	90	110	96	104	92	99	89	97	89	93	86	88	84	80	77																	
5.00	118	100	112	96	107	93	113	98	108	95	103	92	100	91	97	89	91	86	83	80																	
10.00	124	103	120	102	117	100	119	102	116	100	113	98	107	97	105	95	98	92	90	87																	

