


東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF6L-H-GX5 3/D500
光束	510 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

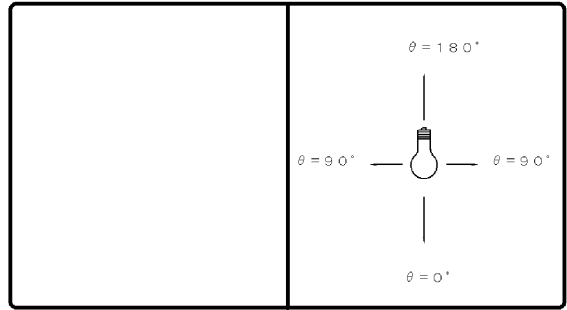

効 率	F		%
	F		%
	F	100	%
	器具 光束	510	lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

データは初期の標準値です。

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	360		
10°	352		
20°	328		
30°	290		
40°	241		
50°	188		
60°	135		
70°	85		
80°	40		
90°	14		
100°	11		
110°	10		
120°	9		
130°	7		
140°	5		
150°	3		
160°	2		
170°	1		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	照 明 率 (×0.01)																																				
0.60	63	58	49	47	41	39	61	56	48	46	40	39	46	44	39	38	38	37	33	31																	
0.80	75	68	61	57	52	50	73	66	60	56	51	49	57	55	50	48	48	47	43	41																	
1.00	82	74	68	63	59	56	79	72	67	62	58	55	64	60	56	54	54	53	48	46																	
1.25	90	80	77	70	67	63	86	78	74	69	66	62	71	67	63	61	61	59	55	52																	
1.50	94	83	82	75	73	68	91	81	80	73	72	67	76	71	69	65	66	64	59	57																	
2.00	103	89	92	82	83	76	99	87	89	81	81	75	84	78	78	73	74	71	67	64																	
2.50	107	92	98	86	90	81	103	90	94	85	87	80	89	82	83	78	79	76	72	69																	
3.00	111	95	102	89	95	85	106	93	99	88	92	84	92	85	87	81	83	79	75	73																	
4.00	115	98	108	94	102	90	110	96	104	92	99	88	97	89	93	86	88	83	80	77																	
5.00	118	100	112	96	107	93	113	98	108	94	103	91	100	91	97	89	91	86	83	80																	
10.00	124	103	120	101	117	100	118	102	116	100	113	98	107	97	105	95	98	92	90	87																	

