

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKR426693L-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	5300 lm

保 守 率	良	0.86
	中	0.81
	否	0.72

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	
反射面	塗装 (白)

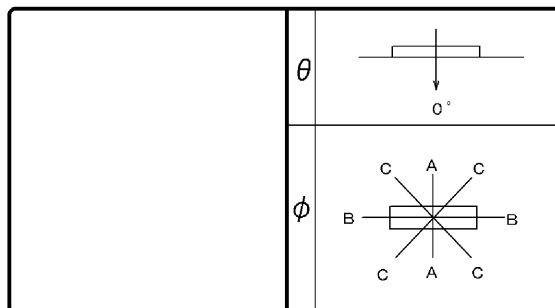

備 考	
--------	--

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30		20	0			
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70			50			30			70			50			30			50	30	30	10	0		
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
					固有照明率 (×0.01)																									
0°	360	360	360	室指数	0.60	64	59	50	47	41	40	62	57	49	46	41	40	47	45	40	39	39	39	34	33					
10°	345	358	358	0.80	76	69	62	58	53	51	74	68	61	58	53	51	59	56	52	50	51	50	45	43						
20°	335	336	340	1.00	84	75	70	65	61	58	81	74	69	64	60	57	66	63	59	57	57	56	51	50						
30°	311	302	314	1.25	92	81	79	72	70	65	89	80	77	71	69	65	74	70	67	64	65	63	59	57						
40°	278	257	277	1.50	97	85	85	77	76	70	93	84	83	76	75	70	79	74	72	69	70	68	64	62						
50°	232	204	228	2.00	105	91	95	84	86	79	101	90	92	83	85	78	88	82	82	77	79	76	72	70						
60°	157	146	170	2.50	109	94	100	89	93	84	106	93	98	88	91	83	93	86	87	82	84	80	77	75						
70°	31	87	78	3.00	113	97	105	92	98	88	109	95	102	91	96	87	96	89	92	85	88	84	81	79						
80°	21	31	20	4.00	117	100	111	96	105	92	113	98	107	95	102	92	101	93	97	90	93	88	86	84						
90°	0	0	0	5.00	120	101	115	98	110	95	116	100	111	97	107	94	104	95	101	93	96	91	89	87						
100°	0	0	0	10.00	125	105	122	103	120	102	121	104	118	102	116	101	111	100	109	99	102	97	95	93						
110°	0	0	0																											
120°	0	0	0																											
130°	0	0	0																											
140°	0	0	0																											
150°	0	0	0																											
160°	0	0	0																											
170°	0	0	0																											
180°	0	0	0																											

