

東芝照明器具配光データシート


名 称	LED照明器具
形 名	LEKR416693N-LD9+F-4172G

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	4650 lm

保 守 率	良	0.86
	中	0.81
	否	0.72

最大取付間隔	
A-A	1.3 H
B-B	1.1 H

前 面	ルーバー (銀色)
反射面	塗装 (白)

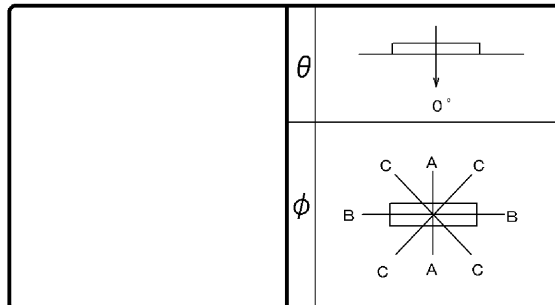

備考

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30		20	0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
						固有照明率 (×0.01)																						
室指数																												
0.60					73	67	60	57	53	51	71	66	60	57	52	51	58	56	52	51	51	50	46	45				
0.80					86	78	74	69	66	63	84	77	73	69	66	63	71	68	65	63	63	62	59	57				
1.00					92	83	81	75	73	69	90	82	79	74	72	69	77	73	71	68	69	68	64	63				
1.25					99	88	88	81	81	76	96	87	87	80	80	75	84	79	78	75	76	74	70	69				
1.50					103	91	94	85	86	80	101	90	92	84	85	80	88	83	83	79	80	78	75	73				
2.00					110	96	102	91	95	87	107	95	100	90	94	87	95	89	90	85	87	84	81	80				
2.50					114	98	107	94	101	91	111	97	104	93	99	90	99	92	95	89	91	88	85	83				
3.00					117	100	110	97	105	94	113	99	107	96	102	93	102	94	98	91	94	90	88	86				
4.00					120	102	115	99	110	97	116	101	112	98	108	96	105	96	102	95	98	93	91	89				
5.00					122	103	118	101	114	99	118	102	114	100	111	98	108	98	105	96	100	95	93	91				
10.00					126	106	124	104	121	103	122	104	120	103	118	102	112	101	110	100	104	98	97	95				

