


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDH81379W-LD

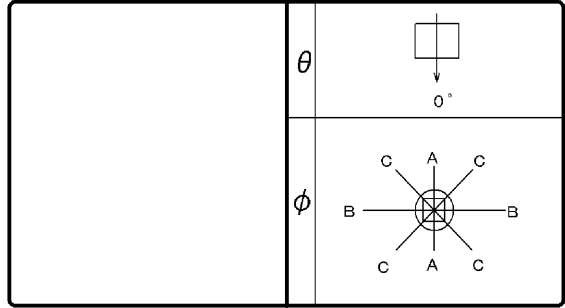

効 率	F ◡	9 %
	F ◡	91 %
	F ○	100 %
	器具 光束	3800 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	288	288	288
10°	284	283	283
20°	272	270	270
30°	251	248	248
40°	222	218	218
50°	185	181	181
60°	143	139	139
70°	98	95	95
80°	57	54	54
90°	28	27	27
100°	16	15	15
110°	13	13	13
120°	12	12	12
130°	12	12	12
140°	12	12	12
150°	12	12	12
160°	12	12	12
170°	12	12	12
180°	13	13	13

反 射 率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0			
室指数		固有照明率 (×0.01)																							
0.60		60	55	45	43	37	35	57	53	44	42	36	35	42	40	35	34	33	33	28	26				
0.80		71	65	57	53	47	45	68	63	55	52	46	45	52	50	45	43	43	42	37	35				
1.00		78	70	64	59	55	52	75	68	62	58	53	51	59	56	51	49	49	48	43	40				
1.25		86	76	72	66	63	59	82	74	70	65	61	58	66	62	58	56	55	54	49	46				
1.50		91	80	78	71	69	64	87	78	75	69	67	63	71	66	63	60	60	58	53	50				
2.00		99	86	88	79	79	72	95	84	85	77	77	71	79	73	72	68	68	66	61	58				
2.50		104	90	94	83	86	77	99	87	90	81	83	76	84	77	78	73	73	70	66	63				
3.00		108	92	99	86	91	81	103	90	95	84	88	80	88	81	82	77	77	74	70	66				
4.00		112	96	105	91	98	86	107	93	101	89	95	85	93	85	88	82	82	78	75	71				
5.00		115	97	109	93	103	90	110	95	104	91	99	88	96	87	92	85	86	81	78	74				
10.00		121	102	118	99	114	97	116	99	113	97	110	95	103	93	101	92	93	88	85	81				

