


東芝照明器具配光データシート

名 称	東芝LED器具
形 名	LEKT423403D-LS9

効 率	F 	5 %
	F 	95 %
	F 	100 %
器具光束		3850 lm

保守率	良	0.88
	中	0.86
	否	0.81

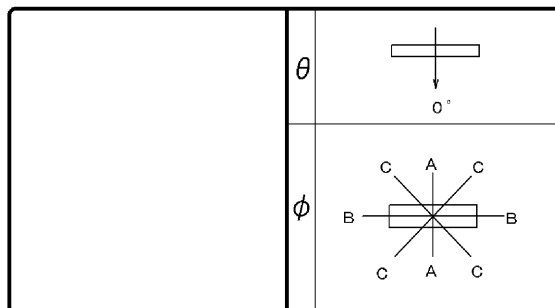

前 面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

備考

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50						30		20	0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
						固有照明率 (×0.01)																						
0°	304	304	304	室指数	0.60																							
10°	299	298	299		0.80																							
20°	286	281	283		1.00																							
30°	263	253	258		1.25																							
40°	233	218	226		1.50																							
50°	198	176	187		2.00																							
60°	159	129	145		2.50																							
70°	121	79	103		3.00																							
80°	86	30	65		4.00																							
90°	58	2	38		5.00																							
100°	40	1	20		10.00																							
110°	13	1	1																									
120°	0	1	1																									
130°	0	1	0																									
140°	0	0	0																									
150°	0	0	0																									
160°	0	0	0																									
170°	1	0	0																									
180°	1	1	0																									

