

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKT423693D-LS9

効 率	F 	5 %
	F 	95 %
	F 	100 %
器具光束		6800 lm

保守率	良	0.88
	中	0.86
	否	0.81

最大取付間隔		
A-A	1.3	H
B-B	1.2	H

前 面	カバー (乳白)
反射面	塗装 (白)

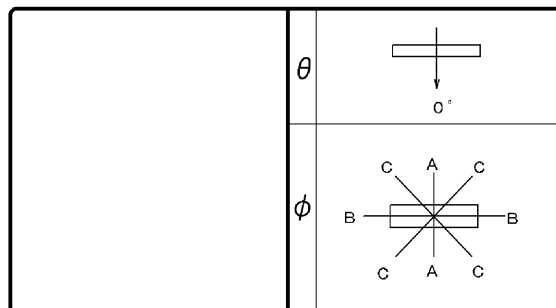

備考

光度 (cd/1000lm)				反射率 (%)	天井		80						70						50						30		20		0					
$\theta \backslash \phi$	A-A	B-B	C-C		壁		70			50			30			70			50			30			50		30		30		10		0	
					床	室指数	固有照明率 (×0.01)																											
0°	304	304	304	0.60	60	55	46	43	37	36	58	54	45	43	36	35	43	41	35	34	34	34	29	27	25	23	21	19	17	15				
10°	299	298	299	0.80	72	65	57	54	48	46	69	63	56	53	47	45	53	51	46	44	44	43	38	36	33	31	29	27	25	23	21			
20°	286	281	283	1.00	79	71	65	60	55	52	76	69	63	59	54	51	60	57	52	50	50	49	44	42	39	37	35	33	31	29	27			
30°	263	253	258	1.25	87	77	73	67	63	59	83	75	71	65	62	58	67	63	59	57	57	55	50	48	45	43	41	39	37	35	33			
40°	233	218	226	1.50	92	81	79	71	69	64	88	79	76	70	67	63	72	67	65	61	62	60	55	52	50	48	46	44	42	40	38			
50°	198	176	187	2.00	100	87	88	79	79	72	96	85	86	77	77	71	80	75	74	69	70	68	63	60	57	55	53	51	49	47	45			
60°	159	129	145	2.50	105	90	94	83	86	77	100	88	91	82	84	76	85	79	79	74	75	72	68	65	62	60	58	56	54	52	50			
70°	121	79	103	3.00	108	93	99	87	91	81	104	91	96	85	89	80	89	82	84	78	79	76	72	69	66	64	62	60	58	56	54			
80°	86	30	65	4.00	113	96	105	91	99	87	108	94	102	90	96	85	95	86	90	83	85	81	77	74	71	69	67	65	63	61	59			
90°	58	2	38	5.00	116	98	109	94	104	90	111	96	105	92	100	89	98	89	94	86	88	84	80	77	74	72	70	68	66	64	62			
100°	40	1	20	10.00	122	102	119	100	115	98	117	100	114	98	111	96	105	95	103	93	96	90	88	85	82	80	78	76	74	72	70			
110°	13	1	1																															
120°	0	1	1																															
130°	0	1	0																															
140°	0	0	0																															
150°	0	0	0																															
160°	0	0	0																															
170°	1	0	0																															
180°	1	1	0																															

