

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKR415693J1D-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	6400 lm

保 守 率	良	0.86
	中	0.81
	否	0.72

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

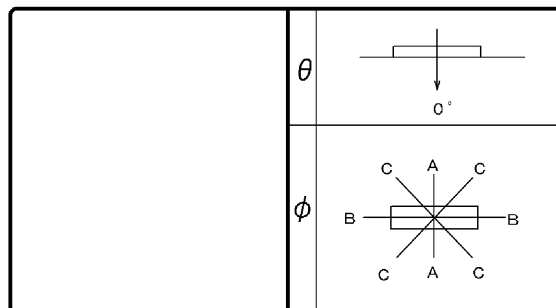

備 考	
--------	--

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30		20	0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					固有照明率 (×0.01)																							
					室指数																							
0°	355	355	355	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
10°	348	349	348																									
20°	330	329	328																									
30°	302	299	298																									
40°	266	258	259																									
50°	221	211	213																									
60°	162	158	160																									
70°	86	99	98																									
80°	9	38	22																									
90°	0	0	0																									
100°	0	0	0																									
110°	0	0	0																									
120°	0	0	0																									
130°	0	0	0																									
140°	0	0	0																									
150°	0	0	0																									
160°	0	0	0																									
170°	0	0	0																									
180°	0	0	0																									

