

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKT750652D-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		6700 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.2 H
B-B	1.3 H

前 面	
反射面	塗装 (白)

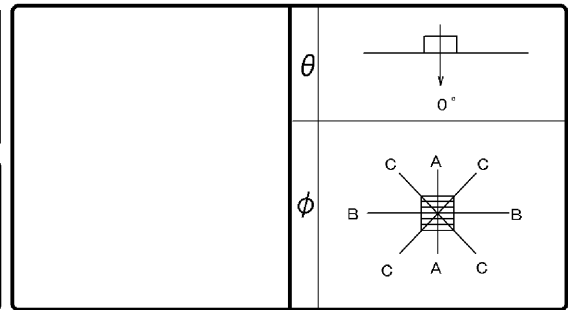

備考	
----	--

光度 (cd/1000lm)				反 射 率 (%)	天 井 壁 床	80						70						50						30			20	0						
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50			30			30			10	0
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
0°	330	330	330	室指数	固 有 照 明 率 (×0.01)																													
10°	323	325	324		0.60	61	57	47	45	38	37	60	55	46	44	38	37	45	43	37	36	37	36	37	36	31	30							
20°	304	310	307		0.80	74	67	59	55	50	48	71	65	58	55	49	47	56	53	48	47	47	46	47	46	41	39							
30°	273	286	279		1.00	81	72	66	62	57	54	78	71	65	61	56	53	62	59	55	53	53	52	47	45									
40°	233	255	243		1.25	89	79	75	69	65	61	86	77	73	68	64	61	70	66	62	60	60	59	54	52									
50°	188	221	201		1.50	94	83	81	73	71	66	90	81	79	72	70	66	75	70	68	65	66	63	59	57									
60°	137	177	159		2.00	102	89	91	81	82	75	99	87	88	80	80	74	84	78	77	73	74	72	67	65									
70°	84	129	109		2.50	107	92	97	86	89	80	103	91	94	85	87	79	89	82	83	78	80	77	73	70									
80°	32	72	58		3.00	111	95	102	89	94	84	107	93	99	88	92	83	93	86	88	82	84	80	77	75									
90°	0	0	1		4.00	116	98	108	94	102	90	111	97	105	93	99	89	99	90	94	87	90	85	82	80									
100°	0	0	0	5.00	118	100	112	96	107	93	114	99	109	95	104	92	102	93	98	90	93	89	86	84										
110°	0	0	0	10.00	125	104	121	102	118	100	120	103	117	101	114	99	109	99	107	97	101	95	93	91										
120°	0	0	0																															
130°	0	0	0																															
140°	0	0	0																															
150°	0	0	0																															
160°	0	0	0																															
170°	0	0	0																															
180°	0	0	0																															

