

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKT751652D-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		6300 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔		
A-A	1.3	H
B-B	1.2	H

前 面	バツフル (白)
反射面	塗装 (白)

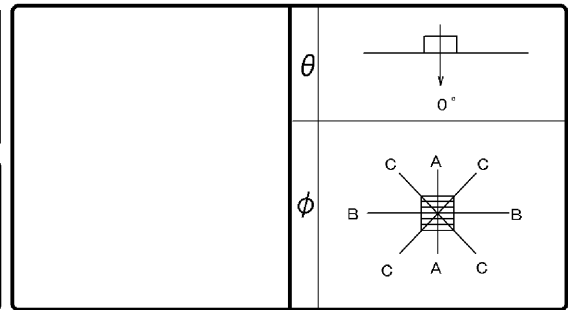

備考	
----	--

光度 (cd/1000lm)				反 射 率 (%)	天 井 壁 床	80						70						50						30			20	0						
θ\φ	A-A	B-B	C-C			70			50			30			70			50			30			50			30			30			10	0
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
						固 有 照 明 率 (×0.01)																												
0°	347	347	347	室指数	0.60	62	57	48	45	39	38	60	56	47	45	39	38	46	44	38	37	37	37	37	37	32	31							
10°	342	335	340	0.80	74	68	60	56	51	49	72	66	59	56	50	48	57	54	49	48	48	47	47	47	42	40								
20°	327	310	319	1.00	82	73	68	63	58	55	79	72	66	62	57	55	63	60	56	54	54	53	48	46										
30°	302	274	287	1.25	89	79	76	70	66	62	86	78	74	69	65	62	71	67	63	61	62	60	55	53										
40°	269	230	247	1.50	94	83	82	74	72	67	91	82	80	73	71	67	76	71	69	66	67	65	60	58										
50°	233	180	202	2.00	103	89	92	82	83	76	99	88	89	81	81	75	85	79	78	74	75	73	68	66										
60°	185	128	153	2.50	108	93	98	86	90	81	104	91	95	85	88	80	90	83	84	79	81	77	74	71										
70°	133	75	98	3.00	111	95	103	90	95	85	107	94	99	89	93	84	94	86	89	83	85	81	78	75										
80°	72	27	43	4.00	116	99	109	94	103	90	112	97	105	93	100	89	99	91	95	88	90	86	83	81										
90°	0	3	4	5.00	119	100	113	97	107	94	114	99	109	96	104	93	102	93	99	91	94	89	86	84										
100°	0	0	0	10.00	125	104	121	102	118	101	120	103	117	101	114	100	109	99	107	97	101	96	94	91										
110°	0	0	0																															
120°	0	0	0																															
130°	0	0	0																															
140°	0	0	0																															
150°	0	0	0																															
160°	0	0	0																															
170°	0	0	0																															
180°	0	0	0																															

