

東芝照明器具配光データシート


名 称	LEDダウンライト
形 名	LEDD-75011FWW-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		7600 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

前 面	下面開放
反射面	梨地処理

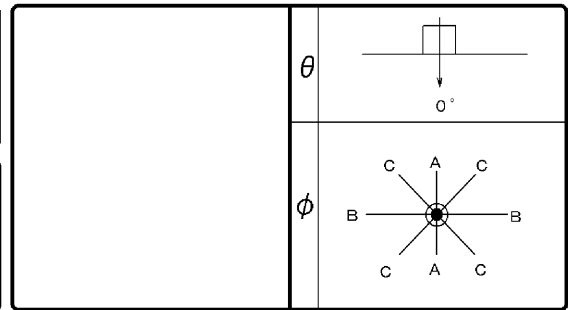

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	631		
10°	623		
20°	569		
30°	468		
40°	308		
50°	132		
60°	60		
70°	10		
80°	2		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		固有照明率 (×0.01)																						
0.60		77	71	65	62	58	57	75	70	65	62	58	56	63	61	57	56	57	56	52	51			
0.80		90	81	79	74	72	69	88	80	78	73	71	68	76	72	70	68	69	67	64	63			
1.00		95	86	85	79	78	74	93	85	84	78	77	73	81	77	75	73	74	72	69	68			
1.25		102	90	92	84	85	79	99	89	90	83	84	79	87	82	82	78	80	77	74	73			
1.50		106	93	97	88	90	83	103	92	95	87	88	83	91	85	86	82	84	81	78	77			
2.00		112	98	104	93	98	89	109	96	102	92	96	89	98	91	93	88	90	87	84	83			
2.50		115	100	109	96	103	93	112	98	106	95	101	92	101	93	97	91	93	90	87	86			
3.00		118	101	112	98	107	95	114	100	109	97	104	94	103	95	100	93	96	92	89	88			
4.00		121	103	116	101	112	98	117	102	113	100	109	98	107	98	104	96	99	94	92	91			
5.00		123	104	119	102	115	100	119	103	115	101	112	99	109	99	106	98	101	96	94	92			
10.00		127	106	125	105	122	104	122	105	120	104	118	103	113	102	111	101	105	99	98	96			

