

東芝照明器具配光データシート


名 称	LEDダウンライト
形 名	LEDD-75023FN2-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		7800 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

前 面	下面開放
反射面	梨地処理

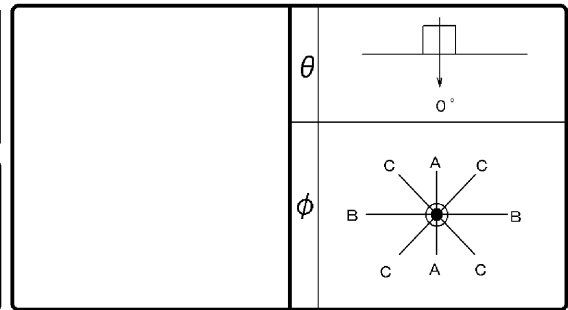

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	1353		
10°	1215		
20°	814		
30°	444		
40°	214		
50°	32		
60°	10		
70°	1		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		固有照明率 (×0.01)																						
0.60	91 84 82 78 76 74 89 83 81 77 76 74 80 77 75 74 75 73 71 70																							
0.80	102 92 94 88 88 85 100 92 93 87 88 84 91 87 87 84 85 84 82 81																							
1.00	105 95 97 90 92 87 103 94 96 90 91 87 94 89 89 86 88 86 84 82																							
1.25	109 97 101 93 96 90 107 96 100 92 95 89 97 91 92 89 91 88 86 85																							
1.50	112 99 105 95 99 92 109 98 103 94 98 92 99 93 95 91 93 90 88 87																							
2.00	116 101 110 98 105 96 113 100 107 97 103 95 103 96 100 94 96 93 91 90																							
2.50	119 102 113 100 108 98 115 101 110 99 106 97 105 97 102 96 99 95 93 91																							
3.00	121 103 115 101 111 99 117 102 112 100 109 98 107 99 104 97 100 96 94 93																							
4.00	123 105 119 103 115 101 119 104 116 102 113 101 110 100 107 99 102 98 96 95																							
5.00	125 106 121 104 118 103 121 104 118 103 115 102 111 101 109 100 104 99 97 96																							
10.00	128 107 127 107 125 106 124 106 122 106 121 105 115 104 114 103 107 101 100 98																							

