


東芝照明器具配光データシート

名称	東芝LED器具
形名	LEKR815643WW-LS9

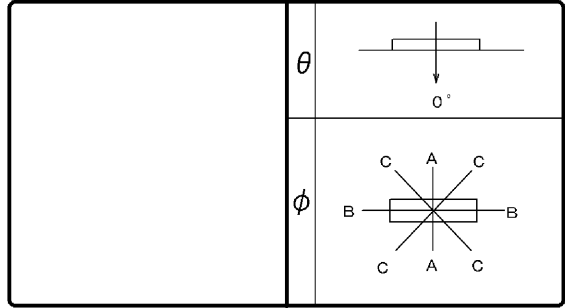

効率	F	0 %
	F	100 %
	F	100 %
	器具光束	5500 lm

保守率	良	0.86
	中	0.81
	否	0.72

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	366	366	366
10°	348	361	360
20°	330	340	340
30°	297	307	307
40°	259	265	264
50°	212	214	214
60°	151	156	157
70°	81	93	93
80°	8	33	25
90°	1	1	1
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 ($\times 0.01$)																							
0.60		63	58	49	47	41	40	62	57	49	46	40	39	47	45	40	39	39	38	34	32				
0.80		76	69	62	58	53	51	74	68	61	57	52	50	59	56	51	50	50	49	45	43				
1.00		83	75	70	64	60	57	81	73	68	64	60	57	66	62	58	56	57	55	51	49				
1.25		91	81	78	72	69	65	88	79	76	71	68	64	73	69	66	63	64	62	58	56				
1.50		96	85	84	76	75	70	93	83	82	75	74	69	78	73	71	68	69	67	63	61				
2.00		104	91	94	84	86	78	101	89	91	83	84	78	87	81	81	76	78	75	71	69				
2.50		109	94	100	88	92	83	105	93	97	87	90	82	92	85	86	81	83	80	76	74				
3.00		113	96	104	91	98	87	109	95	101	90	95	86	96	88	91	85	87	83	80	78				
4.00		117	100	110	96	105	92	113	98	107	94	102	91	101	92	97	89	92	88	85	83				
5.00		120	101	114	98	109	95	115	100	111	97	106	94	104	95	100	92	95	91	88	86				
10.00		125	105	122	103	120	102	121	104	118	102	116	101	110	100	99	102	97	95	93					

