


# 東芝ランプ 配光データシート

名称	東芝LED電球ミニクリプトン形
形名	LDADC7LH-E1 7/D-AL
光束	380 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

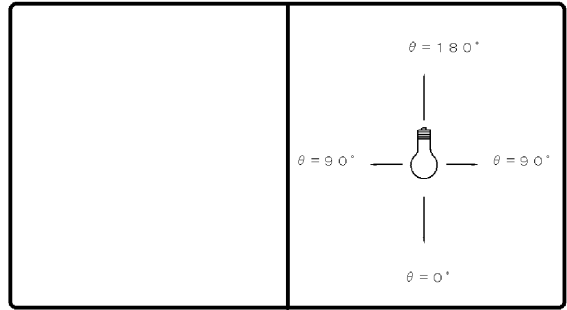

効率	F	%
	F	%
	F	100 %
	器具光束	380 lm

最大取付間隔	
A-A	1.5 H
B-B	1.5 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	167		
10°	167		
20°	166		
30°	165		
40°	163		
50°	160		
60°	156		
70°	152		
80°	147		
90°	141		
100°	135		
110°	129		
120°	122		
130°	115		
140°	108		
150°	100		
160°	93		
170°	85		
180°	78		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	照明率 (×0.01)																																				
0.60	86	79	61	58	46	45	79	73	57	54	43	42	48	46	37	36	30	30	21	15																	
0.80	102	93	76	71	60	57	93	85	70	66	55	53	59	57	47	46	39	39	29	21																	
1.00	116	104	90	83	72	68	105	96	83	77	67	64	70	66	57	55	48	46	36	27																	
1.25	127	113	102	93	84	79	116	104	94	87	78	74	79	74	66	63	55	54	43	33																	
1.50	136	120	112	102	94	87	124	111	103	95	87	82	86	81	74	71	62	60	48	37																	
2.00	150	130	128	114	101	101	136	120	117	106	102	94	98	91	86	82	72	69	57	45																	
2.50	158	136	138	122	111	110	144	126	127	114	113	103	106	98	95	89	79	76	64	51																	
3.00	164	141	146	128	117	117	150	131	134	120	121	109	112	103	102	95	85	81	69	55																	
4.00	173	147	158	136	127	127	157	137	144	127	133	119	120	110	111	103	92	88	76	61																	
5.00	178	151	165	142	133	133	163	141	151	132	141	125	126	115	118	108	98	93	81	66																	
10.00	191	159	182	154	147	147	175	148	174	149	167	144	160	139	139	125	134	122	111	104	94	77															

