


# 東芝ランプ 配光データシート

名称	東芝LED電球ハロゲン形
形名	LDRDC7LWE11 /D-AL2
光束	370 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

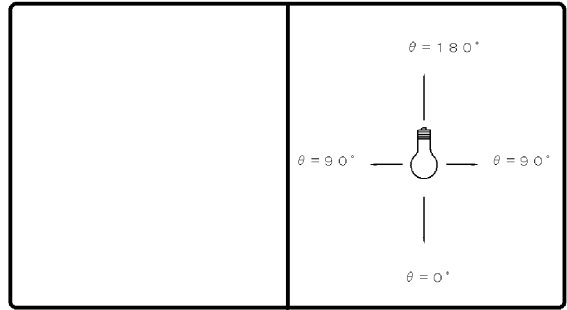

効率	F	%
	F	%
	F	100 %
	器具光束	370 lm

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
0°	2838	25°	429
1°	2824	30°	188
2°	2795	35°	108
3°	2758	40°	60
4°	2712	45°	30
5°	2652	50°	18
6°	2579	55°	14
7°	2492	60°	11
8°	2405	65°	8
9°	2316	70°	5
10°	2218	75°	2
11°	2113	80°	0
12°	2003	85°	0
13°	1887	90°	0
14°	1765		
15°	1636		
16°	1495		
17°	1350		
18°	1210		
19°	1074		
20°	939		

反射率 (%)	天井																			
	80				70				50				30	20	0					
	70	50	30	70	50	30	50	30	50	30	30	10	0							
壁	床																			
床	30	10	30	10	30	10	30	10	30	10	30	10	10	0						
室指数	照明率 (×0.01)																			
0.60	93	86	84	80	79	76	92	85	84	80	78	76	82	79	78	76	77	76	73	72
0.80	101	92	92	86	87	83	99	91	91	86	86	83	89	85	85	82	84	82	80	79
1.00	107	96	98	91	92	88	105	95	97	91	92	87	95	90	90	87	89	86	84	83
1.25	110	98	102	94	96	90	108	97	100	93	95	90	97	92	93	89	91	88	86	85
1.50	113	100	105	95	99	92	110	99	103	95	98	92	100	93	95	91	93	90	88	87
2.00	117	102	110	98	104	95	114	101	108	97	103	95	103	96	99	94	96	92	90	89
2.50	120	103	113	100	108	98	116	102	111	99	106	97	106	98	102	96	98	94	92	91
3.00	122	104	116	102	112	100	118	103	113	101	109	99	108	99	105	97	100	96	94	93
4.00	125	106	121	104	117	103	121	105	117	103	114	102	111	102	109	100	104	99	97	96
5.00	127	107	124	106	121	105	123	106	120	105	117	104	113	103	111	102	106	101	99	98
10.00	132	110	130	110	129	110	127	109	126	109	125	109	118	107	118	107	111	105	104	102

