


東芝ランプ 配光データシート

名称	LEDユニットフラット形 防水形
形名	LDF4N-H-GX5 3/W
光束	450 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

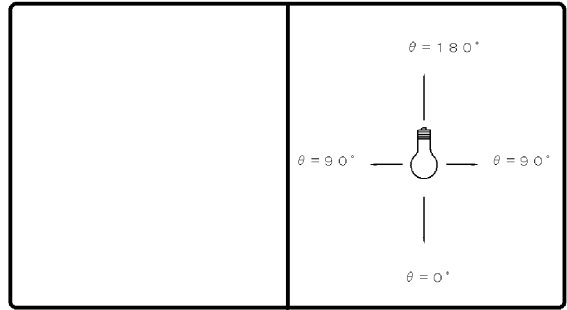

効率	F	%
	F	%
	F	100 %
	器具光束	450 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	383		
10°	375		
20°	350		
30°	310		
40°	257		
50°	198		
60°	138		
70°	82		
80°	33		
90°	5		
100°	5		
110°	4		
120°	3		
130°	3		
140°	2		
150°	2		
160°	1		
170°	1		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	照明率 (×0.01)																																				
0.60	64	59	50	48	42	41	62	58	50	47	42	40	48	46	41	40	40	39	35	33																	
0.80	77	70	63	59	54	52	74	68	62	58	53	51	59	57	52	50	51	50	45	43																	
1.00	84	75	70	65	61	58	81	74	69	64	60	57	66	62	59	56	57	55	51	49																	
1.25	91	81	78	72	69	65	88	79	77	71	68	64	73	69	66	63	64	62	58	55																	
1.50	96	85	84	76	75	70	93	83	82	75	74	69	78	73	71	68	69	67	62	60																	
2.00	104	91	94	84	86	78	101	89	91	83	84	77	86	80	80	76	77	74	70	68																	
2.50	109	94	100	88	92	83	105	92	97	87	90	82	91	84	86	80	82	79	75	73																	
3.00	112	96	104	91	97	87	108	95	101	90	95	86	95	87	90	84	86	82	79	76																	
4.00	117	99	110	95	104	92	112	98	106	94	101	91	100	91	96	89	91	87	84	81																	
5.00	119	101	114	98	109	95	115	99	110	96	105	93	103	94	99	91	94	89	87	84																	
10.00	125	105	122	103	119	101	120	103	117	101	115	100	109	99	107	97	101	95	93	91																	

