


# 東芝ランプ 配光データシート

名称	LEDユニットドーム 形 防水形
形名	LDF4N-H-GX5 3/WR
光束	450 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

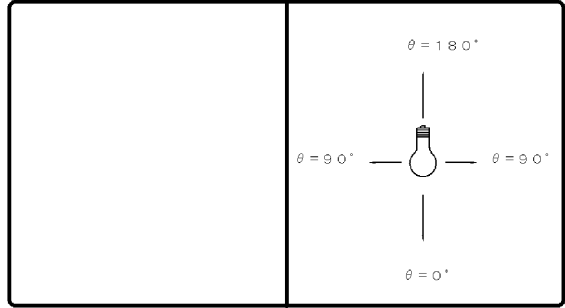

効 率	F		%
	F		%
	F	100	%
	器具 光束	450	lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	296		
10°	291		
20°	277		
30°	252		
40°	219		
50°	181		
60°	140		
70°	98		
80°	63		
90°	38		
100°	22		
110°	12		
120°	7		
130°	4		
140°	2		
150°	1		
160°	1		
170°	1		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0																
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		30		10		0														
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10													
室指数	照 明 率 (×0.01)																																															
0.60	60	55	45	43	37	36	58	53	44	42	36	35	42	41	35	34	34	33	29	26																												
0.80	72	65	57	53	48	46	69	63	55	52	47	45	53	50	45	44	43	42	38	35																												
1.00	79	71	64	60	55	52	76	69	62	58	53	51	59	56	51	49	49	48	43	40																												
1.25	86	77	72	66	63	59	83	74	70	65	61	58	66	62	58	56	56	54	49	46																												
1.50	91	80	78	71	68	64	87	78	76	69	67	63	71	67	64	61	61	59	54	51																												
2.00	100	87	88	79	79	72	95	84	85	77	77	71	79	74	73	68	69	66	62	59																												
2.50	104	90	94	83	85	77	100	88	90	81	83	76	84	78	78	73	74	71	66	63																												
3.00	108	93	99	86	91	81	103	90	95	85	88	80	88	81	82	77	78	74	70	67																												
4.00	113	96	105	91	98	86	108	94	101	89	95	85	93	85	89	82	83	79	75	72																												
5.00	116	98	109	94	103	90	110	96	105	92	99	88	97	88	92	85	86	82	78	75																												
10.00	122	102	118	100	114	97	116	100	113	98	110	95	104	94	101	92	94	89	86	83																												

