

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKR415524HJ1N-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		4800 lm

保守率	良	0.86
	中	0.81
	否	0.72

最大取付間隔		
A-A	1.3	H
B-B	1.2	H

前 面	カバー (乳白)
反射面	塗装 (白)

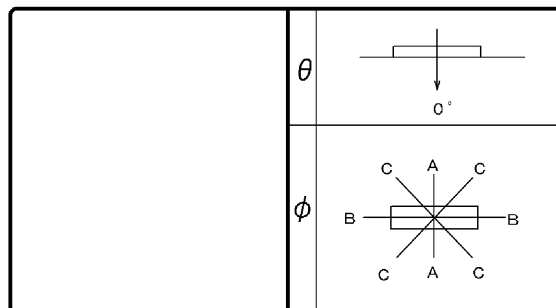

備考	
----	--

光度 (cd/1000lm)				反射率 (%)	天井		80						70						50						30		20		0					
$\theta \backslash \phi$	A-A	B-B	C-C		壁		70			50			30			70			50			30			50		30		30		10		0	
					床	室指数	固有照明率 (×0.01)																											
0°	355	355	355	0.60	63	58	49	46	40	39	61	57	48	46	40	39	46	45	39	38	38	38	33	32	32	32	32	32	32	32				
10°	348	349	348	0.80	75	68	61	57	52	50	73	67	60	57	52	50	58	55	50	49	49	48	44	42	42	42	42	42	42	42	42			
20°	330	329	328	1.00	83	74	69	64	60	57	80	73	68	63	59	56	65	62	57	55	56	55	50	48	48	48	48	48	48	48	48			
30°	302	299	298	1.25	91	80	78	71	68	64	88	79	76	70	67	63	73	68	65	62	63	62	57	55	55	55	55	55	55	55	55			
40°	266	258	259	1.50	96	84	83	76	74	69	92	83	81	75	73	69	78	73	71	67	69	66	62	60	60	60	60	60	60	60	60			
50°	221	211	213	2.00	104	91	94	84	85	78	101	89	91	82	84	77	87	80	80	76	77	75	71	69	69	69	69	69	69	69	69			
60°	162	158	160	2.50	109	94	99	88	92	83	105	92	97	87	90	82	92	85	86	81	83	79	76	74	74	74	74	74	74	74	74			
70°	86	99	98	3.00	112	96	104	91	97	87	108	95	101	90	95	86	96	88	91	84	87	83	80	78	78	78	78	78	78	78	78			
80°	9	38	22	4.00	117	99	110	95	104	92	113	98	107	94	102	91	101	92	97	89	92	88	85	83	83	83	83	83	83	83	83			
90°	0	0	0	5.00	120	101	114	98	109	95	115	100	110	97	106	94	104	95	100	92	95	90	88	86	86	86	86	86	86	86	86			
100°	0	0	0	10.00	125	105	122	103	119	102	121	104	118	102	116	100	110	100	108	98	102	97	95	93	93	93	93	93	93	93	93			
110°	0	0	0																															
120°	0	0	0																															
130°	0	0	0																															
140°	0	0	0																															
150°	0	0	0																															
160°	0	0	0																															
170°	0	0	0																															
180°	0	0	0																															

