

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKR426694HWW-LD9+F-42123

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	4650 lm

保守 率	良	0.81
	中	0.77
	否	0.72

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

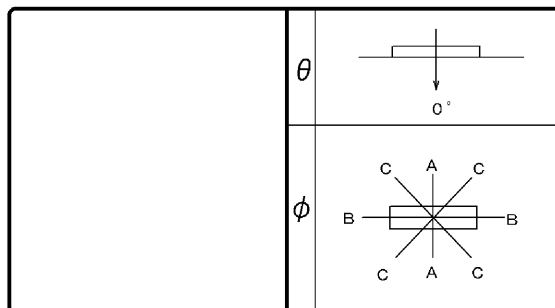

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	355	355	355
10°	349	347	349
20°	328	329	327
30°	295	298	294
40°	252	255	252
50°	202	206	203
60°	149	152	151
70°	95	98	96
80°	43	45	44
90°	1	1	1
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	固有照明率 (×0.01)																						
0.60	63	58	49	46	40	39	61	56	48	46	40	38	46	44	39	38	38	37	33	31			
0.80	75	68	61	57	52	49	73	67	60	56	51	49	58	55	50	48	49	48	43	41			
1.00	82	74	68	63	59	56	79	72	67	62	58	55	64	61	57	55	55	54	49	47			
1.25	90	80	77	70	67	63	87	78	75	69	66	62	72	67	64	61	62	61	56	54			
1.50	95	84	82	75	73	68	92	82	80	74	72	67	77	72	70	66	67	65	61	59			
2.00	103	90	92	83	84	77	100	88	90	81	82	76	85	79	79	75	76	73	69	67			
2.50	108	93	98	87	90	82	104	91	96	86	88	81	90	84	85	79	81	78	74	72			
3.00	111	96	103	90	96	85	107	94	100	89	93	85	94	87	89	83	85	82	78	76			
4.00	116	99	109	94	103	91	112	97	106	93	100	90	100	91	95	88	91	86	83	81			
5.00	119	101	113	97	108	94	115	99	109	96	105	93	103	94	99	91	94	89	87	85			
10.00	125	104	122	102	119	101	120	103	117	101	115	100	110	99	108	98	101	96	94	92			

