


# 東芝照明器具配光データシート

名称	東芝LED器具
形名	LEKR427694HWW-LS9+F-421 15N

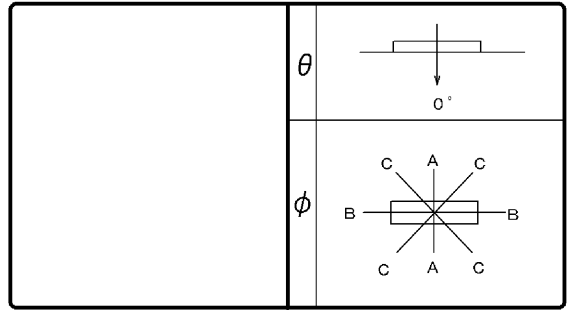

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	3750 lm

保 守 率	良	0.81
	中	0.77
	否	0.72

前面	木枠カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	352	352	352
10°	346	345	345
20°	326	330	326
30°	295	304	296
40°	254	264	256
50°	206	216	209
60°	152	161	155
70°	91	100	95
80°	30	38	34
90°	0	1	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反 射 率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		30		10		0		30		10		0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数		固有照明率 (×0.01)																																			
0.60		63	58	49	46	40	39	61	57	48	46	40	38	46	44	39	38	38	38	33	31																
0.80		75	68	61	57	52	50	73	67	60	56	51	49	58	55	50	49	49	48	43	42																
1.00		82	74	69	64	59	56	80	72	67	63	58	56	65	61	57	55	56	54	50	48																
1.25		90	80	77	71	68	63	87	79	75	70	67	63	72	68	65	62	63	61	57	54																
1.50		95	84	83	75	74	69	92	82	81	74	73	68	77	72	70	67	68	66	61	59																
2.00		104	90	93	83	85	77	100	89	91	82	83	77	86	80	80	75	77	74	70	68																
2.50		108	94	99	87	91	82	105	92	96	86	89	81	91	84	85	80	82	79	75	73																
3.00		112	96	104	91	97	86	108	94	101	90	94	85	95	87	90	84	86	82	79	77																
4.00		117	99	110	95	104	91	112	98	106	94	101	90	100	92	96	89	91	87	84	82																
5.00		119	101	114	98	109	94	115	100	110	96	105	93	103	94	100	92	95	90	87	85																
10.00		125	105	122	103	119	101	121	103	118	102	115	100	110	99	108	98	102	96	94	92																

