

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKT751852L-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		7350 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔		
A-A	1.3	H
B-B	1.2	H

前 面	バツフル (白)
反射面	塗装 (白)

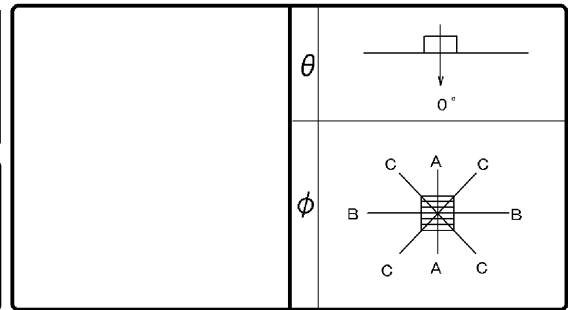

備考	
----	--

光度 (cd/1000lm)				反 射 率 (%)	天 井 壁 床	80						70						50						30			20	0						
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50			30			30			10	0
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数						固 有 照 明 率 (×0.01)																												
0.60						62	57	48	45	39	38	60	56	47	45	39	38	46	44	38	37	37	37	37	37	37	37	37	37	32	31			
0.80						74	68	60	56	51	49	72	66	59	56	50	48	57	54	49	48	48	48	47	47	47	47	47	42	40				
1.00						82	73	68	63	58	55	79	72	66	62	57	55	63	60	56	54	54	53	53	53	53	53	53	48	46				
1.25						89	79	76	70	66	62	86	78	74	69	65	62	71	67	63	61	62	60	60	60	60	60	60	55	53				
1.50						94	83	82	74	72	67	91	82	80	73	71	67	76	71	69	66	67	65	65	65	65	65	60	58					
2.00						103	89	92	82	83	76	99	88	89	81	81	75	85	79	78	74	75	73	68	68	68	68	68	68	66				
2.50						108	93	98	86	90	81	104	91	95	85	88	80	90	83	84	79	81	77	74	71	71	71	71	71	71				
3.00						111	95	103	90	95	85	107	94	99	89	93	84	94	86	89	83	85	81	78	75	75	75	75	75	75				
4.00						116	99	109	94	103	90	112	97	105	93	100	89	99	91	95	88	90	86	83	81	81	81	81	81	81				
5.00						119	100	113	97	107	94	114	99	109	96	104	93	102	93	99	91	94	89	86	84	84	84	84	84	84				
10.00						125	104	121	102	118	101	120	103	117	101	114	100	109	99	107	97	101	96	94	91	91	91	91	91	91				

