


# 東芝照明器具配光データシート

名称	東芝LED照明器具
形名	LEDT31687N-LS1

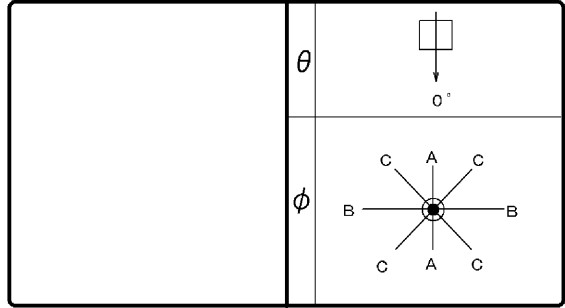

効率	F	19%
	F	81%
	F	100%
	器具光束	960 lm

保守率	良	0.69
	中	0.67
	否	0.63

前面	グローブ (フロスト)
反射面	

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備考

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	210		
10°	211		
20°	205		
30°	193		
40°	176		
50°	153		
60°	128		
70°	100		
80°	71		
90°	45		
100°	42		
110°	39		
120°	34		
130°	29		
140°	23		
150°	15		
160°	7		
170°	2		
180°	1		

反射率 (%)	天井	80						70						50						30						20						0																
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		30		10		0														
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10													
室指数	固有照明率 (×0.01)																																															
0.60	56	51	41	39	33	32	53	49	40	38	32	31	37	35	30	29	28	27	22	20																												
0.80	67	61	52	49	43	41	63	58	50	47	41	40	46	44	39	37	36	35	30	27																												
1.00	74	66	59	55	49	47	70	63	57	53	48	45	52	49	44	43	41	40	35	31																												
1.25	82	72	67	62	57	54	77	69	64	60	55	52	59	55	51	49	47	46	40	37																												
1.50	86	76	73	66	63	59	82	73	70	64	61	57	63	59	56	53	52	50	44	40																												
2.00	95	82	83	74	73	67	89	79	79	71	70	65	71	66	65	61	59	57	52	47																												
2.50	100	86	89	78	80	72	94	82	84	76	76	70	76	70	70	65	64	61	56	51																												
3.00	103	89	94	82	85	76	97	85	89	79	81	74	80	74	74	69	68	65	60	55																												
4.00	108	92	100	87	93	82	102	88	95	84	89	79	85	78	80	74	73	69	64	59																												
5.00	111	94	104	89	98	85	105	91	99	86	93	83	88	80	84	77	76	72	68	63																												
10.00	118	98	114	96	110	93	111	95	107	93	104	90	96	87	93	85	84	79	75	70																												

