


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDL40T・Y/17 /21-Y2
光束	2150 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

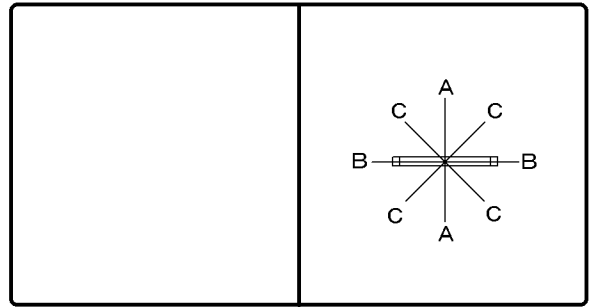

効率	F		%
	F		%
	F	100	%
	器具光束	2150	lm

最大取付間隔	
A-A	1.27 H
B-B	1.23 H

備考
初期特性データです。
ランプ単体での配光データです。

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	315	318	316
10°	311	311	311
20°	296	296	294
30°	272	259	266
40°	239	215	229
50°	201	164	186
60°	157	111	141
70°	112	62	97
80°	71	21	60
90°	42	0	35
100°	26	2	21
110°	18	2	14
120°	12	2	9
130°	9	3	7
140°	6	3	5
150°	5	3	4
160°	4	4	4
170°	4	4	4
180°	0	0	0

反射率 (%)	天井		80				70				50				30		20	0		
	壁	床	70	50	30	70	50	30	50	30	50	30	30	10	0	10	0			
室指数	照明率 (×0.01)																			
0.60	61	56	47	44	38	37	59	55	46	44	38	36	44	42	36	36	35	35	30	28
0.80	73	66	59	55	49	47	70	64	57	54	48	47	54	52	47	45	45	44	39	37
1.00	80	72	66	61	56	53	77	70	64	60	55	53	61	58	53	51	51	50	45	42
1.25	88	78	74	68	64	60	84	76	72	66	63	60	68	64	60	58	58	56	51	49
1.50	93	82	80	72	70	65	89	79	77	71	69	64	73	68	66	62	63	61	56	53
2.00	101	88	90	80	81	74	97	85	87	78	79	72	81	75	74	70	71	68	64	61
2.50	105	91	95	84	87	79	101	89	92	83	85	77	86	79	80	75	76	72	68	65
3.00	109	93	100	88	92	82	104	91	96	86	90	81	90	83	84	78	79	76	72	69
4.00	114	97	106	92	100	88	109	94	102	90	96	86	95	87	90	83	85	81	77	74
5.00	116	99	110	95	105	91	111	96	106	93	101	89	98	89	94	86	88	83	80	77
10.00	123	103	119	100	116	98	117	100	114	98	111	96	105	95	103	93	95	90	87	84

