


東芝ランプ 配光データシート

名称	DC駆動LED電球クリヤー高出力タイプ
形名	LDADC7LHE17 C/D-AL
光束	360 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

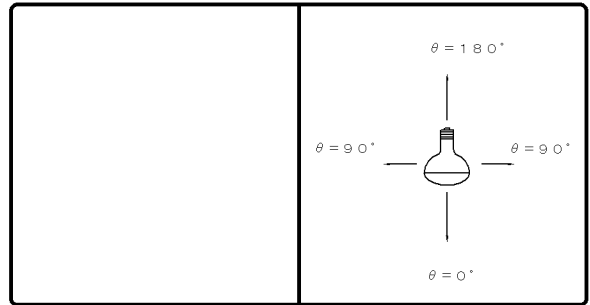

効率	F	%
	F	%
	F	100 %
	器具光束	360 lm

最大取付間隔	
A-A	1.65 H
B-B	1.65 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		217	
10°		238	
20°		257	
30°		278	
40°		236	
50°		138	
60°		75	
70°		71	
80°		77	
90°		74	
100°		43	
110°		39	
120°		8	
130°		4	
140°		3	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井		80				70				50				30		20	0		
	壁	床	70	50	30	10	70	50	30	10	70	50	30	10	50	30	30	10		
室指数	照明率 (×0.01)																			
0.60	57	53	43	41	34	33	55	51	41	39	33	32	39	37	32	31	30	30	25	23
0.80	67	61	53	50	44	42	64	59	51	48	42	41	48	45	40	39	38	37	32	30
1.00	76	68	62	57	52	49	72	66	60	56	51	48	55	53	48	46	45	44	39	36
1.25	83	74	69	64	60	56	79	71	67	62	58	55	62	58	54	52	51	50	44	41
1.50	88	78	75	68	66	61	84	75	72	66	64	60	67	63	60	57	56	54	49	45
2.00	96	83	84	75	75	68	91	80	81	73	72	67	74	69	67	64	63	60	55	52
2.50	100	87	90	79	81	73	95	84	86	77	78	71	79	73	72	68	67	64	60	56
3.00	104	89	94	82	86	77	98	86	90	80	83	75	82	75	76	71	71	67	63	59
4.00	108	92	100	87	93	82	102	89	95	84	89	80	87	79	82	75	75	72	67	63
5.00	111	94	104	89	98	85	105	91	99	87	93	83	90	82	85	78	78	74	70	66
10.00	117	98	113	95	108	92	111	95	107	92	103	90	97	87	94	85	85	81	77	72

