

東芝照明器具配光データシート


名 称	LED照明器具
形 名	LEET-42301T-LS9+LEEM-41203N-PS

効 率	F 	1 %
	F 	99 %
	F 	100 %
	器具 光束	11500 lm

保 守 率	良	0.83
	中	0.81
	否	0.77

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

前 面	カバー (乳白)
反射面	

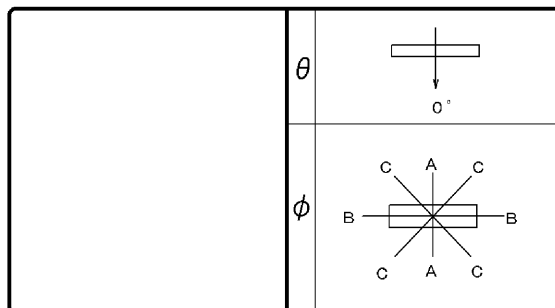

備 考	LEET-42301T-LS9+LEEM-41203N-PS
--------	--------------------------------

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	425	425	425
10°	408	408	408
20°	367	367	367
30°	311	311	311
40°	251	251	251
50°	193	193	193
60°	138	138	138
70°	85	85	85
80°	35	35	35
90°	3	3	3
100°	1	1	1
110°	1	1	1
120°	1	1	1
130°	1	1	1
140°	1	1	1
150°	1	1	1
160°	1	1	1
170°	2	2	2
180°	2	2	2

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																					
0.60		65	60	51	49	43	42	63	59	50	48	43	41	49	47	42	41	41	40	36	34		
0.80		77	70	64	60	55	52	75	69	62	59	54	52	60	57	53	51	52	51	46	44		
1.00		84	75	71	66	62	59	81	74	69	65	61	58	67	63	59	57	58	56	52	50		
1.25		92	81	79	72	70	65	89	80	77	71	69	65	74	69	67	64	65	63	58	56		
1.50		96	85	84	77	76	70	93	83	82	76	74	70	79	74	72	68	70	67	63	61		
2.00		104	91	94	84	86	78	101	89	92	83	84	78	87	81	81	76	78	75	71	69		
2.50		109	94	100	88	92	83	105	92	97	87	90	82	92	85	86	81	83	79	76	74		
3.00		112	96	104	91	97	87	108	95	101	90	95	86	95	88	90	84	86	83	79	77		
4.00		117	99	110	95	104	92	113	98	107	94	102	91	100	92	96	89	92	87	84	82		
5.00		119	101	114	98	109	95	115	100	110	96	106	94	103	94	100	92	95	90	87	85		
10.00		125	105	122	103	119	101	120	103	118	102	115	100	110	99	108	98	101	96	94	92		

