

東芝照明器具配光データシート


名 称	東芝LED照明
形 名	LEET-42351C6T-LS9+LEEM-41203WW-01

効 率	F 	7 %
	F 	93 %
	F 	100 %
器具光束		11100 lm

保守率	良	0.83
	中	0.81
	否	0.77

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	

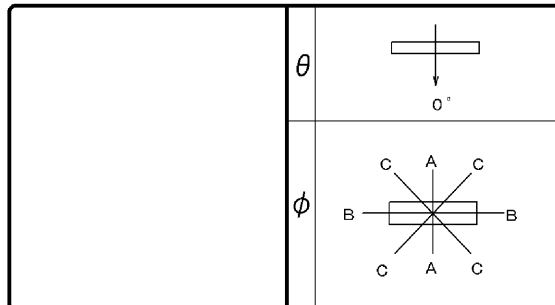

備考	LEET-42351C6T-LS9+LEEM-41203WW-01
----	-----------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	293	295	294
10°	289	289	289
20°	276	273	274
30°	255	246	250
40°	227	211	219
50°	193	171	182
60°	157	126	142
70°	120	78	101
80°	86	31	64
90°	57	2	36
100°	36	2	19
110°	22	2	11
120°	14	2	8
130°	9	1	7
140°	8	1	5
150°	6	1	4
160°	4	1	3
170°	3	1	2
180°	1	1	1

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	固有照明率 (×0.01)																						
0.60	60	55	45	43	36	35	57	53	44	42	36	35	42	40	35	34	34	33	28	26			
0.80	71	65	57	53	47	45	69	63	55	52	46	45	52	50	45	43	43	42	37	35			
1.00	78	70	64	59	54	52	75	68	62	58	53	51	59	56	51	49	49	48	43	40			
1.25	86	76	72	66	62	59	83	74	70	65	61	58	66	62	58	56	56	54	49	46			
1.50	91	80	78	71	68	63	87	78	75	69	67	62	71	66	64	60	61	59	54	51			
2.00	99	86	88	78	79	72	95	84	85	77	77	71	79	74	72	68	69	66	61	58			
2.50	104	90	94	83	85	77	100	88	90	81	83	76	84	78	78	73	74	71	66	63			
3.00	108	92	98	86	91	81	103	90	95	84	88	80	88	81	82	77	78	74	70	67			
4.00	113	96	105	91	98	86	108	93	101	89	95	85	93	85	89	82	83	79	75	72			
5.00	115	98	109	93	103	90	110	95	105	92	99	88	97	88	92	85	86	82	79	75			
10.00	122	102	118	99	114	97	116	100	113	98	110	95	104	94	101	92	94	89	86	83			

