


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDU-05305W-RD1

保守率	良	0.86
	中	0.81
	否	0.72

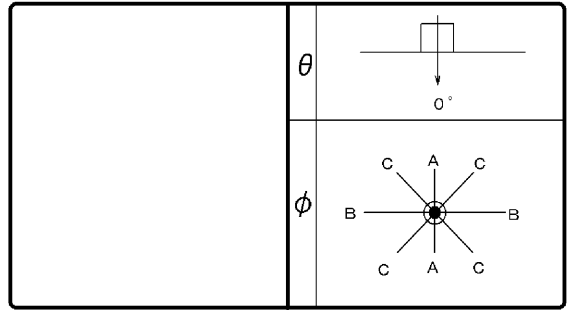

光源	名称	
	形名	LED
	光束	400 lm x 1

効率	F	0%
	F	100%
	F	100%
	器具光束	400 lm

最大取付間隔	
A-A	0.5 H
B-B	0.5 H

備考	
----	--

前面	
反射面	塗装(白)

0°	4270	25°	255
1°		30°	68
2°		35°	12
3°		40°	4
4°		45°	2
5°	3874	50°	1
6°		55°	0
7°		60°	0
8°		65°	0
9°		70°	0
10°	2973	75°	0
11°		80°	0
12°		85°	0
13°		90°	0
14°			
15°	1835		
16°			
17°			
18°			
19°			
20°	782		

反射率 (%)	天井	80				70				50				30		20		0
	壁	70	50	30	70	50	30	50	30	50	30	30	10	30	10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数	照明率 (x0.01)																	
0.60	11110210610110310011010210510110310010410010299101999998																	
0.80	118107114107111106117107113107110106111106109106108106105105																	
1.00	118106113105109104116105111104108103109104107103105102102101																	
1.25	1171041121031081011151041101021071011071011051001031009998																	
1.50	118104113103109101116104111102108101108101105100103999897																	
2.00	12010411510311110111710411210210910010810110599102989796																	
2.50	122105117103113102118104114103111101109101107100103999896																	
3.00	123105119104115103119105116103113102110102108101104999897																	
4.00	12610712210611910512210611910511610411310311110310610110099																	
5.00	127108125107123107123107121106119106115104113104108103102100																	
10.00	131110131110130111127109126109126110119107119108112106105104																	

