


東芝照明器具配光データシート

名称	東芝LED地中埋込投光器
形名	LEDS-03601LW-LS1

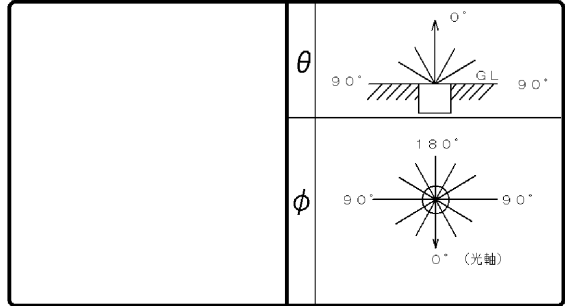

効 率	F ◡	0 %
	F ◢	100 %
	F ○	100 %
	器具 光束	280 lm

保守 率	良	0.69
	中	0.67
	否	0.63

前面	ガラス (フロスト)
反射面	

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備考

θ \ φ	A-A	B-B	C-C
0°	634		
10°	654		
20°	618		
30°	453		
40°	270		
50°	128		
60°	56		
70°	24		
80°	8		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	固有照明率 (×0.01)																																				
0.60	73	67	60	57	53	51	71	66	59	57	52	51	58	56	51	50	51	50	46	45	51	50	46	45	51	50	46	45									
0.80	83	76	71	67	63	61	81	75	70	66	63	61	68	65	62	60	61	59	56	54	61	60	56	54	61	60	56	54									
1.00	92	83	81	75	73	69	90	82	79	74	72	69	77	73	71	68	69	67	64	62	69	68	64	62	69	68	64	62									
1.25	99	88	88	81	80	75	96	87	86	80	79	75	83	78	77	74	75	73	70	68	75	74	70	68	75	74	70	68									
1.50	104	91	94	85	86	80	101	90	92	84	85	80	88	83	83	79	80	78	74	73	80	79	74	73	80	79	74	73									
2.00	110	96	102	91	95	87	107	95	99	90	93	86	95	88	90	85	87	84	81	79	87	86	81	79	87	86	81	79									
2.50	114	98	107	94	100	90	111	97	104	93	98	90	99	91	94	88	91	87	84	83	91	90	84	83	91	90	84	83									
3.00	117	100	110	97	105	93	113	99	107	96	102	93	102	94	98	91	94	90	87	85	94	93	87	85	94	93	87	85									
4.00	120	102	115	99	110	97	116	101	112	98	107	96	105	96	102	94	97	93	91	89	97	96	90	89	97	96	90	89									
5.00	123	104	118	101	114	99	118	102	114	100	111	98	108	98	105	96	100	95	93	91	99	98	92	91	99	98	92	91									
10.00	127	106	124	105	122	104	122	105	120	104	118	103	113	102	111	101	105	99	97	95	103	102	96	95	103	102	96	95									

