


東芝照明器具配光データシート

名称	東芝LED照明器具
形名	LEET-42501-LS9+LEEM-405 24N-HGD

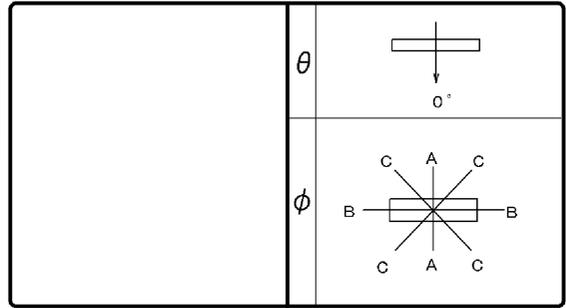

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	4100 lm

保 守 率	良	0.81
	中	0.77
	否	0.68

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	426	428	428
10°	415	416	415
20°	389	389	388
30°	347	351	344
40°	291	292	292
50°	221	211	222
60°	140	100	124
70°	60	56	54
80°	3	20	12
90°	0	1	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反 射 率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 ($\times 0.01$)																							
0.60	67	61	53	51	45	44	65	60	53	50	45	44	51	49	44	43	43	43	39	37					
0.80	80	72	66	62	58	56	78	71	65	62	57	55	63	60	56	55	55	54	50	48					
1.00	87	78	74	69	65	62	84	76	73	68	65	62	70	66	63	61	62	60	56	54					
1.25	94	84	82	75	74	69	91	82	81	75	73	69	77	73	71	68	69	67	63	61					
1.50	99	87	88	80	80	74	96	86	86	79	78	73	82	77	76	72	74	71	68	66					
2.00	107	93	97	87	90	82	104	92	95	86	88	81	91	84	85	80	82	79	75	74					
2.50	111	96	103	91	96	86	108	95	100	90	94	86	95	88	90	84	87	83	80	78					
3.00	114	98	107	94	101	90	111	97	104	93	98	89	99	91	94	88	90	86	83	81					
4.00	119	101	113	97	107	94	114	99	109	96	104	93	103	94	99	92	95	90	88	86					
5.00	121	102	116	99	111	97	117	101	112	98	108	96	106	96	103	94	97	93	90	88					
10.00	126	105	123	104	121	102	121	104	119	103	117	101	111	100	109	99	103	97	96	94					

