

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEER-42501-LD9+LEEM-404 03YY-01

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	1330 lm

保 守 率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	ガラス (乳白)
反射面	塗装 (白)

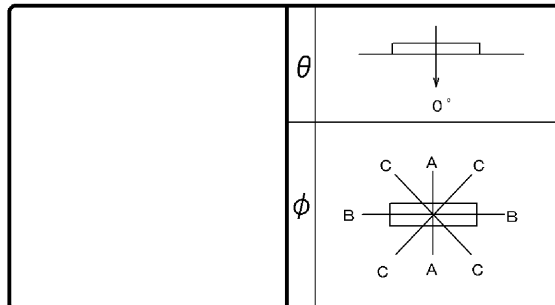

備考

光度 (cd/1000lm)				反 射 率 (%)	天井		80						70						50						30		20	0
$\theta \backslash \phi$	A-A	B-B	C-C		壁		70		50		30		70		50		30		50		30		30		10	0		
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数				固 有 照 明 率 (×0.01)																								
0.60				67	61	53	51	45	44	65	60	53	50	45	44	51	49	44	43	43	43	39	37					
0.80				79	72	66	62	58	55	77	71	65	61	57	55	63	60	56	54	55	54	50	48					
1.00				86	78	74	68	65	62	84	76	72	67	64	61	70	66	63	60	61	60	55	54					
1.25				94	83	82	75	73	69	91	82	80	74	72	68	77	72	70	67	68	66	62	60					
1.50				99	87	87	79	79	73	96	85	85	78	78	73	82	77	75	72	73	71	67	65					
2.00				106	93	97	86	89	81	103	91	94	85	87	81	90	84	84	79	81	78	75	73					
2.50				111	96	102	90	95	86	107	94	99	89	93	85	94	87	89	84	86	82	79	77					
3.00				114	98	106	93	100	89	110	96	103	92	98	88	98	90	93	87	89	85	82	81					
4.00				118	100	112	97	107	94	114	99	109	96	104	93	102	94	99	91	94	90	87	85					
5.00				121	102	115	99	111	96	116	101	112	98	108	95	105	96	102	94	97	92	90	88					
10.00				126	105	123	104	120	102	121	104	119	102	116	101	111	100	109	99	103	97	95	93					

