

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEET-42841A-LS9+LEEM-40694W-HG

効 率	F 	4 %
	F 	96 %
	F 	100 %
器具光束		6200 lm

保守率	良	0.77
	中	0.72
	否	0.68

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (透明)
反射面	塗装 (白)

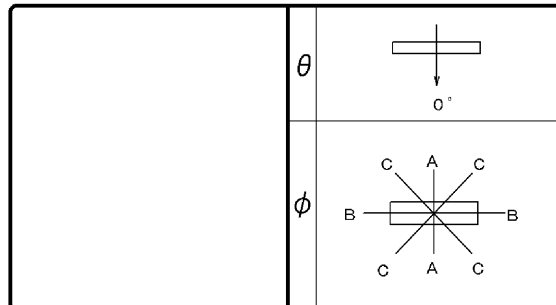

備考

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50						30		20	0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					固有照明率 (×0.01)																							
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10
室指数																												
0°	301	300	301		0.60	60	55	45	43	37	35	58	54	44	42	36	35	43	41	35	34	34	33	29	27			
10°	298	294	296		0.80	72	65	57	53	47	45	69	63	56	52	47	45	53	51	45	44	44	43	38	36			
20°	284	277	281		1.00	79	71	64	60	54	52	76	69	63	58	53	51	60	56	52	50	50	49	44	41			
30°	263	250	256		1.25	86	77	72	66	62	59	83	75	70	65	61	58	67	63	59	56	57	55	50	47			
40°	235	214	224		1.50	91	81	78	71	68	64	88	78	76	70	67	63	72	67	64	61	62	60	55	52			
50°	202	171	186		2.00	100	87	88	79	79	72	96	85	85	77	77	71	80	74	73	69	70	67	63	60			
60°	167	122	145		2.50	104	90	94	83	85	77	100	88	91	82	83	76	85	79	79	74	75	72	68	65			
70°	134	69	105		3.00	108	93	99	86	91	81	104	91	95	85	88	80	89	82	83	78	79	76	71	69			
80°	103	22	74		4.00	113	96	105	91	98	86	108	94	101	89	95	85	94	86	90	83	84	80	77	74			
90°	70	3	39		5.00	116	98	109	94	103	90	111	96	105	92	100	88	98	89	94	86	88	84	80	77			
100°	37	6	8		10.00	122	102	118	100	115	98	117	101	114	98	111	96	105	95	103	93	96	91	88	85			
110°	1	4	1																									
120°	0	2	0																									
130°	0	1	0																									
140°	0	0	0																									
150°	0	0	0																									
160°	0	0	0																									
170°	0	0	0																									
180°	1	1	1																									

