

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEER-23002-LD9+LEEM-201 63W-CG

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	1250 lm

保 守 率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

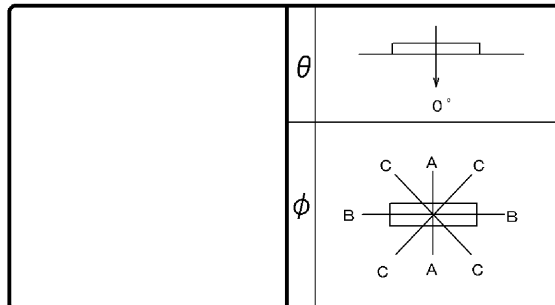

備考

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30			20	0
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30			10	0		
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
						室指数	固 有 照 明 率 (×0.01)																					
0°	406	407	407	0.60	65	60	52	49	43	42	64	59	51	48	43	42	49	47	42	41	42	41	37	35				
10°	396	396	397	0.80	78	71	64	60	56	53	76	69	63	60	55	53	61	58	54	52	53	52	47	46				
20°	368	370	369	1.00	85	76	72	67	63	60	83	75	71	66	62	59	68	64	61	59	59	58	54	52				
30°	326	327	326	1.25	93	82	80	74	71	67	90	81	79	73	70	66	75	71	68	65	67	65	60	58				
40°	273	272	272	1.50	98	86	86	78	77	72	95	84	84	77	76	71	80	75	74	70	72	69	65	63				
50°	208	210	211	2.00	106	92	96	85	88	80	102	90	93	84	86	79	89	83	83	78	80	77	73	71				
60°	141	144	143	2.50	110	95	101	90	94	85	106	94	99	88	92	84	94	86	88	83	85	81	78	76				
70°	73	77	75	3.00	113	97	106	93	99	88	110	96	103	92	97	88	97	89	92	86	89	85	82	80				
80°	4	21	18	4.00	118	100	112	96	106	93	114	99	108	95	103	92	102	93	98	91	93	89	86	84				
90°	0	1	0	5.00	120	102	115	99	110	96	116	100	111	98	107	95	105	95	102	93	96	92	89	87				
100°	0	0	0	10.00	126	105	123	104	120	102	121	104	119	102	116	101	111	100	109	99	103	97	95	93				
110°	0	0	0																									
120°	0	0	0																									
130°	0	0	0																									
140°	0	0	0																									
150°	0	0	0																									
160°	0	0	0																									
170°	0	0	0																									
180°	0	0	0																									

