


# 東芝照明器具配光データシート

名称	LEDシーリングダウンライト
形名	LEDD-60423WW-LD9

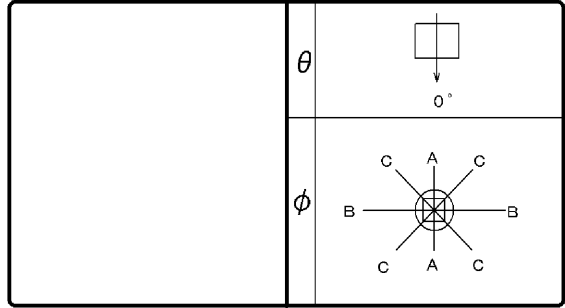

効 率	F ◡	0 %
	F ◒	100 %
	F ○	100 %
	器具 光束	5430 lm

保守 率	良	0.76
	中	0.72
	否	0.64

前面	カバー (透明)
反射面	樹脂 (白)

最大取付間隔	
A-A	0.8 H
B-B	0.8 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1220		
10°	1102		
20°	804		
30°	378		
40°	147		
50°	87		
60°	52		
70°	26		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射 率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		30		10		10		30		10		10		0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10		
室指数		固有照明率 (×0.01)																																			
0.60		86	80	77	73	71	69	85	79	76	73	70	68	75	72	70	68	69	68	65	64																
0.80		97	88	88	83	82	79	96	88	87	82	82	79	85	81	81	78	79	78	75	74																
1.00		101	91	92	86	86	82	99	90	91	85	85	81	89	84	84	81	82	80	78	76																
1.25		106	94	97	89	91	85	103	93	95	88	89	85	92	87	87	84	85	83	80	79																
1.50		109	96	101	91	94	88	106	95	99	91	93	87	95	89	91	86	88	85	83	82																
2.00		114	99	106	95	101	92	111	98	104	94	99	91	100	93	96	90	93	89	87	85																
2.50		117	101	110	97	105	95	113	100	108	97	103	94	103	95	99	93	95	91	89	88																
3.00		119	102	113	99	108	97	115	101	110	98	106	96	105	96	101	95	97	93	91	90																
4.00		122	104	117	102	113	100	118	103	114	101	111	99	108	99	105	97	101	96	94	92																
5.00		124	105	120	103	117	102	120	104	116	102	114	101	110	100	108	99	102	97	96	94																
10.00		128	107	126	106	124	106	123	106	122	105	120	105	114	103	113	103	107	101	100	98																

