


東芝照明器具配光データシート

名称	LEDシーリングダウンライト
形名	LEDD-75423W-LD9

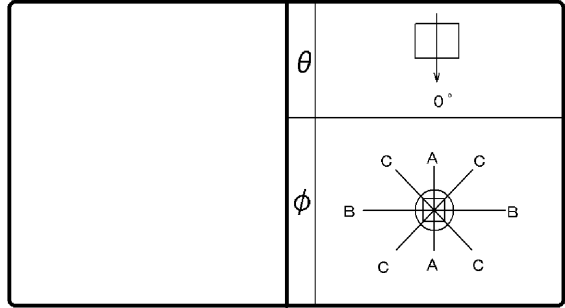

効 率	F	0 %
	F	100 %
	F	100 %
器具 光束		7510 lm

保 守 率	良	0.76
	中	0.72
	否	0.64

前面	カバー (透明)
反射面	樹脂 (白)

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

備考

θ \ φ	光度 (cd/1000lm)		
	A-A	B-B	C-C
0°	1133		
10°	1032		
20°	693		
30°	333		
40°	198		
50°	107		
60°	57		
70°	35		
80°	14		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30						20						0																
	壁	70		50		30		70		50		30		50		30		30		30		10		0		30		10		0																		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10																			
室指数	固有照明率 (×0.01)																																															
0.60	83	76	72	68	66	64	81	75	71	68	65	63	70	67	65	63	64	63	60	59																												
0.80	94	85	84	78	77	74	92	84	83	78	77	74	81	77	75	73	74	73	70	69																												
1.00	98	88	88	82	81	77	96	87	87	81	81	77	84	80	79	76	78	76	73	72																												
1.25	103	91	93	86	87	81	100	90	92	85	86	81	89	84	83	80	82	79	76	75																												
1.50	106	94	97	88	91	84	104	93	96	88	90	84	92	86	87	83	85	82	79	78																												
2.00	112	97	104	93	98	89	109	96	102	92	96	89	97	90	93	88	90	86	84	82																												
2.50	115	99	108	96	102	92	112	98	105	95	100	92	101	93	96	90	93	89	87	85																												
3.00	118	101	111	98	106	95	114	100	108	97	104	94	103	95	99	93	95	91	89	87																												
4.00	121	103	116	100	112	98	117	102	113	99	109	97	106	97	103	96	99	94	92	90																												
5.00	123	104	119	102	115	100	119	103	115	101	112	99	109	99	106	98	101	96	94	92																												
10.00	127	106	125	106	123	105	123	105	121	105	119	104	113	102	112	106	100	99	97	97																												

