


## ■ 東芝ランプ 配光データシート

名称	LEDランプ
形名	LDA9L-G/80W /2
光束	1160 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

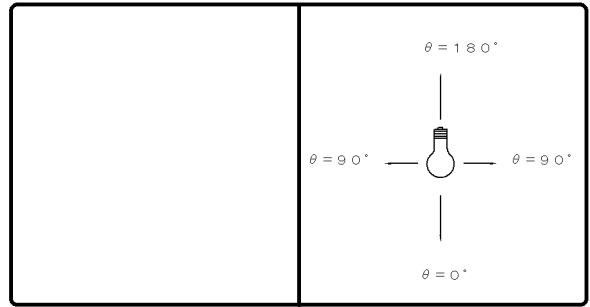

効率	F	%
	F	%
	F	100 %
	器具光束	1160 lm

最大取付間隔	
A-A	1.48 H
B-B	1.48 H

備考

光度 (cd/1000lm)			
$\theta$	$\phi$	A-A	B-B C-C
0°		121	
10°		121	
20°		120	
30°		119	
40°		117	
50°		113	
60°		108	
70°		101	
80°		92	
90°		83	
100°		74	
110°		64	
120°		55	
130°		46	
140°		37	
150°		30	
160°		24	
170°		18	
180°		1	

反射率 (%)	天井			70			50			30		20		0						
	壁	70	50	30	70	50	30	50	30	30	10	0	30	10	0					
	床			30			10			30		10		0						
室指数	照明率 (×0.01)																			
0.60	51	47	37	35	28	27	48	44	34	33	26	25	30	29	23	23	20	20	15	12
0.80	61	56	46	43	36	35	57	52	43	41	34	33	38	36	30	30	27	26	21	17
1.00	68	61	53	49	43	41	63	57	50	46	40	39	43	41	36	34	31	30	25	20
1.25	76	67	61	56	50	47	70	63	57	52	47	45	49	46	42	40	36	35	29	24
1.50	80	71	66	60	56	52	74	66	62	57	52	49	53	50	46	44	40	39	32	27
2.00	89	77	76	68	66	60	82	72	71	64	62	57	61	57	54	51	47	45	39	32
2.50	93	81	82	72	72	65	86	76	76	68	68	62	65	60	59	55	51	49	42	36
3.00	97	83	87	76	78	69	90	78	80	72	73	66	69	64	63	59	55	52	46	39
4.00	102	87	93	81	85	75	94	82	87	76	80	71	74	68	69	64	59	57	50	43
5.00	105	89	98	84	91	79	97	84	90	79	84	75	78	71	73	67	63	60	54	46
10.00	113	94	108	91	103	88	104	89	100	86	96	83	86	77	83	75	71	67	61	53

