


東芝照明器具配光データシート

名称	LEDライン器具
形名	BN061C3WWL3

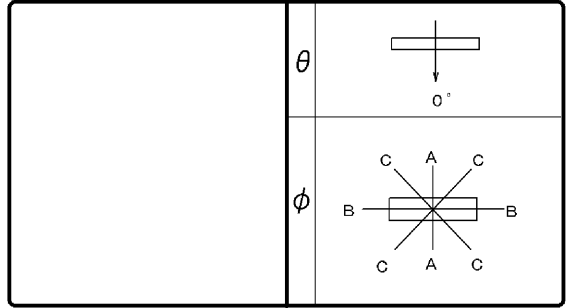

効 率	F	12%
	F	87%
	F	99%
	器具光束	275 lm

保守率	良	0.88
	中	0.86
	否	0.81

前面	カバー (乳白)
反射面	

最大取付間隔	
A-A	1.4 H
B-B	1.3 H

備考
フィリップスブランド (銘版型名) :
BN061C LED3/WW L300 100V JP

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	225	225	225
10°	225	221	224
20°	222	209	217
30°	213	190	204
40°	201	164	187
50°	185	133	165
60°	166	97	141
70°	146	60	117
80°	125	24	94
90°	101	3	72
100°	70	3	29
110°	40	3	20
120°	30	2	16
130°	21	0	12
140°	13	0	8
150°	8	0	6
160°	4	0	3
170°	1	0	1
180°	0	0	0

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		30		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数		固有照明率 (×0.01)																																			
0.60		56	52	41	39	32	31	54	50	40	38	32	31	37	36	30	29	29	28	23	21																
0.80		67	61	52	49	42	41	64	59	50	47	41	40	47	45	39	38	37	36	31	28																
1.00		74	67	59	55	49	47	71	64	57	53	48	46	53	50	45	43	43	41	36	33																
1.25		82	73	67	62	57	53	78	70	65	60	55	52	60	56	52	50	49	47	42	39																
1.50		87	76	73	66	63	58	82	74	70	64	61	57	65	61	57	54	53	52	46	43																
2.00		95	83	83	74	73	67	90	80	79	72	70	65	73	68	66	62	61	59	54	50																
2.50		100	86	89	78	80	72	95	83	85	76	77	70	78	72	71	67	66	63	58	54																
3.00		104	89	94	82	85	76	98	86	89	80	82	74	82	75	76	70	70	67	62	58																
4.00		109	92	100	87	93	82	103	90	96	84	89	80	87	80	82	76	76	72	67	63																
5.00		112	95	104	90	98	85	106	92	99	87	94	83	91	82	86	79	79	75	71	67																
10.00		119	99	114	96	110	94	113	96	109	94	105	91	99	89	96	87	87	83	79	75																

