

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKTW412254SL-LS9

効 率	F 	6 %
	F 	94 %
	F 	100 %
	器具 光束	2330 lm

保 守 率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

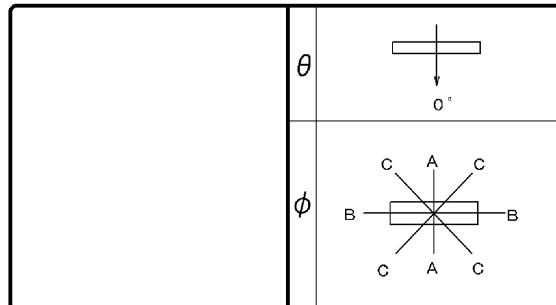

備考

光度 (cd/1000lm)				反 射 率 (%)	天井	80			70			50			30	20	0
θ \ φ	A-A	B-B	C-C		壁	70	50	30	70	50	30	50	30	50	30	10	0
0°	300	301	300	床	30	10	30	10	30	10	30	10	30	10	30	10	0
10°	296	295	295	室指数	固有照明率 (×0.01)												
20°	284	279	281	0.60	60	55	46	43	37	36	58	54	45	43	36	35	43
30°	263	253	257	0.80	72	65	57	54	48	46	69	63	56	53	47	45	53
40°	234	218	225	1.00	79	71	65	60	55	52	76	69	63	59	54	51	60
50°	198	177	186	1.25	87	77	73	67	63	59	83	75	71	66	62	58	67
60°	158	131	143	1.50	92	81	79	71	69	64	88	79	76	70	68	63	72
70°	118	80	99	2.00	100	87	89	79	80	73	96	85	86	78	77	72	80
80°	81	30	58	2.50	105	90	95	84	86	78	100	88	91	82	84	76	85
90°	51	1	30	3.00	108	93	99	87	92	82	104	91	96	85	89	80	89
100°	29	1	14	4.00	113	96	106	91	99	87	108	94	102	90	96	86	94
110°	17	1	9	5.00	116	98	110	94	104	90	111	96	105	92	100	89	98
120°	12	1	7	10.00	122	102	119	100	115	98	117	100	114	98	111	96	105
130°	10	1	8														
140°	9	1	8														
150°	9	1	2														
160°	1	1	1														
170°	1	1	1														
180°	1	1	1														

