

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKTW423104SN-LS9

効 率	F 	5 %
	F 	95 %
	F 	100 %
	器具 光束	9390 lm

保 守 率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

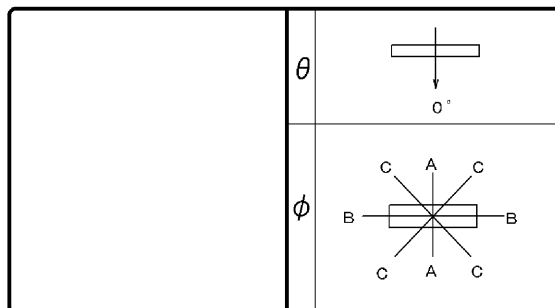

備考

光度 (cd/1000lm)				反 射 率 (%)	天井		80						70						50						30		20	0			
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70			50			30			70			50			30			50		30		10	0		
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
						固有照明率 (×0.01)																									
0°	302	303	303	室指数																											
10°	299	298	298	0.60	60	55	46	43	37	36	58	54	45	43	36	35	43	41	35	35	34	34	29	27							
20°	286	281	283	0.80	72	65	57	54	48	46	69	64	56	53	47	45	53	51	46	44	44	43	38	36							
30°	265	255	259	1.00	79	71	65	60	55	52	76	69	63	59	54	52	60	57	52	50	50	49	44	42							
40°	235	220	227	1.25	87	77	73	67	63	59	83	75	71	66	62	59	67	63	59	57	57	55	51	48							
50°	200	179	188	1.50	92	81	79	72	69	64	88	79	77	70	68	63	72	68	65	62	62	60	55	53							
60°	160	132	144	2.00	100	87	89	79	80	73	96	85	86	78	78	72	81	75	74	70	70	68	63	60							
70°	120	81	100	2.50	105	91	95	84	86	78	101	88	91	82	84	77	86	79	79	74	75	72	68	65							
80°	83	30	59	3.00	109	93	99	87	92	82	104	91	96	85	89	81	89	82	84	78	79	76	72	69							
90°	52	1	31	4.00	113	96	106	92	99	87	109	94	102	90	96	86	95	87	90	83	85	81	77	74							
100°	31	1	16	5.00	116	98	110	94	104	90	111	96	106	93	100	89	98	89	94	86	88	84	80	77							
110°	20	1	11	10.00	123	102	119	100	115	98	117	101	114	98	111	96	105	95	103	93	96	91	88	85							
120°	14	1	1																												
130°	1	1	1																												
140°	1	1	1																												
150°	1	1	1																												
160°	1	1	1																												
170°	1	1	1																												
180°	1	1	1																												

