


東芝照明器具配光データシート

名称	LEDブラケット
形名	WL046CLED6W WPSU1

保守率	良	0.69
	中	0.67
	否	0.63

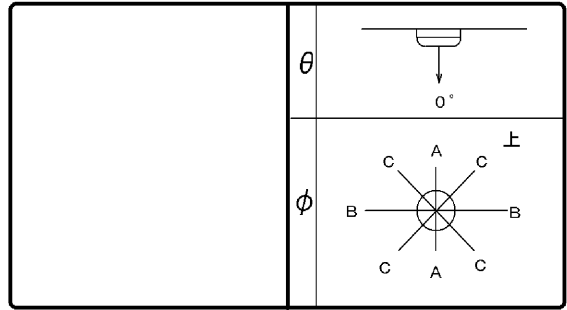

光源	名称	LED
	形名	—
	光束	600 lm × 1

効率	F ◡	6%
	F ◡	95%
	F ○	101%
	器具光束	600 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
フィリップスブランド
(銘版型名) :
WL046C LED6/WW PSU
100V JP

前面	
反射面	

0°	313	25°	275
1°	313	30°	260
2°	313	35°	242
3°	312	40°	223
4°	312	45°	203
5°	311	50°	182
6°	310	55°	160
7°	310	60°	138
8°	309	65°	117
9°	307	70°	98
10°	306	75°	80
11°	305	80°	64
12°	303	85°	49
13°	302	90°	37
14°	300		
15°	298		
16°	297		
17°	295		
18°	293		
19°	290		
20°	288		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30	70	50	30	50	30	50	30	30	10	30	10	0				
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数	照明率 (×0.01)																			
0.60	61	56	46	44	37	36	58	54	45	43	37	36	43	41	36	35	35	34	30	27
0.80	72	66	58	54	48	46	70	64	56	53	48	46	54	51	46	45	44	43	39	36
1.00	79	71	65	60	55	52	76	69	63	59	54	52	60	57	52	50	50	49	44	42
1.25	87	77	73	67	63	59	84	75	71	66	62	59	67	63	59	57	57	55	50	48
1.50	92	81	79	72	69	64	88	79	76	70	68	63	72	67	65	62	62	60	55	52
2.00	100	87	89	79	80	73	96	85	86	78	77	72	80	75	74	69	70	67	63	60
2.50	105	90	95	84	86	78	100	88	91	82	84	76	85	79	79	74	75	72	67	65
3.00	109	93	99	87	91	82	104	91	96	85	89	80	89	82	83	78	79	75	71	68
4.00	113	96	106	91	99	87	108	94	102	90	96	85	94	86	90	83	84	80	76	73
5.00	116	98	110	94	104	90	111	96	105	92	100	89	98	89	93	86	87	83	80	77
10.00	123	102	119	100	115	98	117	100	114	98	111	96	105	95	102	93	95	90	87	84

