


東芝照明器具配光データシート

名称	LEDブラケット
形名	WL046CLEd6C WPSU1

保守率	良	0.69
	中	0.67
	否	0.63

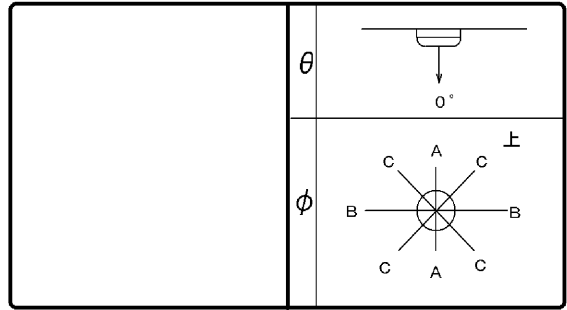

光源	名称	LED
	形名	—
	光束	700 lm × 1

効率	F	6%
	F	94%
	F	100%
	器具光束	700 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考
フィリップスブランド
(銘版型名) :
WL046C LED6/CW PSU
100V JP

前面	
反射面	

0°	302	25°	269
1°	302	30°	255
2°	302	35°	238
3°	302	40°	221
4°	301	45°	201
5°	301	50°	181
6°	300	55°	160
7°	299	60°	139
8°	299	65°	119
9°	298	70°	100
10°	297	75°	82
11°	296	80°	66
12°	294	85°	51
13°	293	90°	39
14°	292		
15°	290		
16°	288		
17°	287		
18°	285		
19°	283		
20°	281		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	50	30	50	30	50	30	30	10	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	照明率 (×0.01)																							
0.60	60	55	46	43	37	36	58	54	45	42	36	35	43	41	35	34	34	33	29	27				
0.80	72	65	57	54	48	46	69	63	56	53	47	45	53	51	45	44	44	43	38	36				
1.00	79	71	64	60	55	52	76	69	63	59	54	51	59	56	52	50	50	48	43	41				
1.25	86	77	73	66	63	59	83	75	70	65	61	58	66	63	59	56	56	55	50	47				
1.50	91	80	78	71	69	64	88	78	76	70	67	63	71	67	64	61	61	59	54	51				
2.00	100	87	88	79	79	72	95	84	85	77	77	71	80	74	73	69	69	67	62	59				
2.50	104	90	94	83	85	77	100	88	91	81	83	76	85	78	78	73	74	71	67	64				
3.00	108	93	99	86	91	81	103	90	95	85	88	80	88	81	83	77	78	75	71	68				
4.00	113	96	105	91	98	86	108	94	101	89	95	85	94	86	89	82	83	80	76	73				
5.00	116	98	109	94	103	90	111	96	105	92	99	88	97	88	93	85	87	83	79	76				
10.00	122	102	118	100	115	97	117	100	113	98	110	96	104	94	102	93	95	89	87	84				

