


東芝照明器具配光データシート

名称	LEDブラケット
形名	WL046CLED12 WWPSU1

保守率	良	0.69
	中	0.67
	否	0.63

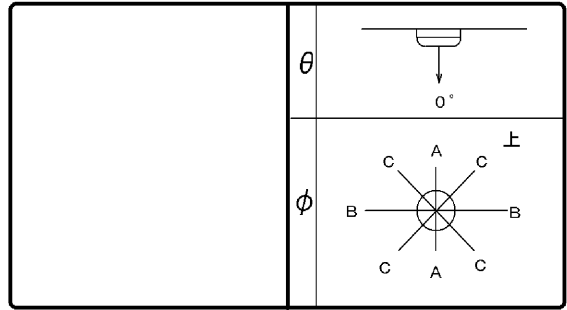

光源	名称	LED
	形名	—
	光束	1200 lm × 1

効率	F	5%
	F	95%
	F	100%
	器具光束	1200 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
フィリップスブランド
(銘版型名) :
WL046C LED12/WW PSU
100V JP

前面	
反射面	

0°	308	25°	273
1°	308	30°	258
2°	307	35°	242
3°	307	40°	223
4°	307	45°	204
5°	306	50°	183
6°	306	55°	161
7°	305	60°	139
8°	304	65°	119
9°	303	70°	99
10°	302	75°	81
11°	301	80°	65
12°	299	85°	50
13°	298	90°	38
14°	297		
15°	295		
16°	293		
17°	291		
18°	289		
19°	287		
20°	285		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30		70	50	30		50	30		50	30	30	10	0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数	照明率 (×0.01)																			
0.60	60	55	46	44	37	36	58	54	45	43	37	35	43	41	35	35	34	34	29	27
0.80	72	65	57	54	48	46	69	64	56	53	47	45	53	51	46	44	44	43	38	36
1.00	79	71	65	60	55	52	76	69	63	59	54	51	60	57	52	50	50	49	44	41
1.25	87	77	73	67	63	59	83	75	71	65	62	58	67	63	59	57	57	55	50	48
1.50	92	81	79	71	69	64	88	79	76	70	67	63	72	67	64	61	62	60	55	52
2.00	100	87	88	79	79	72	96	85	85	77	77	71	80	74	73	69	70	67	62	60
2.50	105	90	94	83	86	77	100	88	91	82	83	76	85	79	79	74	75	72	67	64
3.00	108	93	99	87	91	81	104	91	95	85	88	80	89	82	83	78	79	75	71	68
4.00	113	96	105	91	99	87	108	94	101	89	95	85	94	86	89	83	84	80	76	73
5.00	116	98	109	94	103	90	111	96	105	92	100	88	97	89	93	86	87	83	80	77
10.00	122	102	118	100	115	98	117	100	114	98	110	96	105	95	102	93	95	90	87	84

