

東芝照明器具配光データシート


名称	LEDブラケット
形名	WL046CLED12 CWPSU1

光源	名称	LED
	形名	—
	光束	1400 lm × 1

前面	
反射面	

保守率	良	0.69
	中	0.67
	否	0.63

効率	F	5%
	F	95%
	F	100%
	器具光束	1400 lm

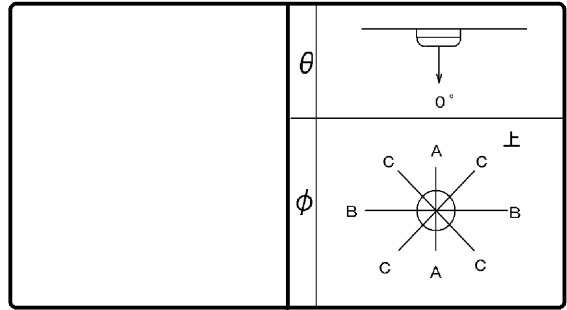

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考
 フィリップスブランド
 (銘版型名) :
 WL046C LED12/CW PSU
 100V JP

0°	306	25°	272
1°	306	30°	258
2°	306	35°	241
3°	306	40°	223
4°	305	45°	203
5°	305	50°	182
6°	304	55°	161
7°	304	60°	139
8°	303	65°	119
9°	302	70°	99
10°	301	75°	81
11°	300	80°	65
12°	298	85°	51
13°	297	90°	38
14°	295		
15°	294		
16°	292		
17°	290		
18°	288		
19°	286		
20°	284		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	50	30	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0					
室指数	照明率 (×0.01)																							
0.60	60	55	46	43	37	36	58	54	45	43	36	35	43	41	35	35	34	34	29	27				
0.80	72	65	57	54	48	46	69	63	56	53	47	45	53	51	46	44	44	43	38	36				
1.00	79	71	65	60	55	52	76	69	63	59	54	51	60	57	52	50	50	49	44	41				
1.25	87	77	73	67	63	59	83	75	71	65	62	58	67	63	59	57	57	55	50	47				
1.50	91	81	78	71	69	64	88	78	76	70	67	63	72	67	64	61	61	59	55	52				
2.00	100	87	88	79	79	72	96	85	85	77	77	71	80	74	73	69	70	67	62	60				
2.50	104	90	94	83	86	77	100	88	91	82	83	76	85	78	79	74	75	72	67	64				
3.00	108	93	99	87	91	81	103	91	95	85	88	80	89	82	83	77	78	75	71	68				
4.00	113	96	105	91	98	86	108	94	101	89	95	85	94	86	89	82	84	80	76	73				
5.00	116	98	109	94	103	90	111	96	105	92	100	88	97	89	93	86	87	83	79	76				
10.00	122	102	118	100	115	97	117	100	113	98	110	96	105	95	102	93	95	90	87	84				

