

東芝照明器具配光データシート


名称	LEDブラケット
形名	WL046CLED20 CWPSU1

光源	名称	LED
	形名	—
	光束	2300 lm × 1

前面	
反射面	

保守率	良	0.69
	中	0.67
	否	0.63

効率	F	5%
	F	95%
	F	100%
	器具光束	2300 lm

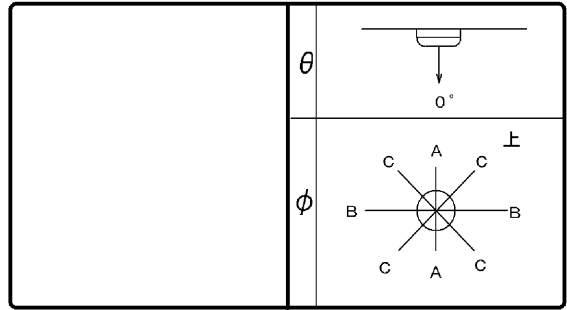

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
 フィリップスブランド
 (銘版型名) :
 WL046C LED20/CW PSU
 100V JP

0°	309	25°	274
1°	309	30°	259
2°	309	35°	243
3°	308	40°	225
4°	308	45°	205
5°	307	50°	184
6°	307	55°	162
7°	306	60°	140
8°	305	65°	120
9°	304	70°	100
10°	303	75°	81
11°	302	80°	64
12°	300	85°	49
13°	299	90°	36
14°	297		
15°	296		
16°	294		
17°	292		
18°	290		
19°	288		
20°	286		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30	70	50	30	50	30	50	30	30	10	30	10	0				
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数	照明率 (×0.01)																			
0.60	60	55	46	44	37	36	58	54	45	43	37	35	43	41	36	35	35	34	29	27
0.80	72	65	57	54	48	46	69	64	56	53	47	45	53	51	46	44	44	43	39	36
1.00	79	71	65	60	55	52	76	69	63	59	54	51	60	57	52	50	50	49	44	42
1.25	87	77	73	67	63	59	83	75	71	66	62	58	67	63	59	57	57	55	50	48
1.50	92	81	79	71	69	64	88	79	76	70	67	63	72	67	64	61	62	60	55	52
2.00	100	87	88	79	79	72	96	85	85	77	77	71	80	75	73	69	70	67	63	60
2.50	105	90	94	83	86	77	100	88	91	82	83	76	85	79	79	74	75	72	68	65
3.00	108	93	99	87	91	81	104	91	95	85	88	80	89	82	83	78	79	75	71	69
4.00	113	96	105	91	99	87	108	94	101	89	95	85	94	86	90	83	84	80	77	74
5.00	116	98	109	94	103	90	111	96	105	92	100	89	98	89	93	86	88	83	80	77
10.00	122	102	118	100	115	98	117	100	114	98	110	96	105	95	102	93	95	90	87	85

