


# 東芝照明器具配光データシート

名称	東芝LED器具
形名	LSS9MP/RP-2-14

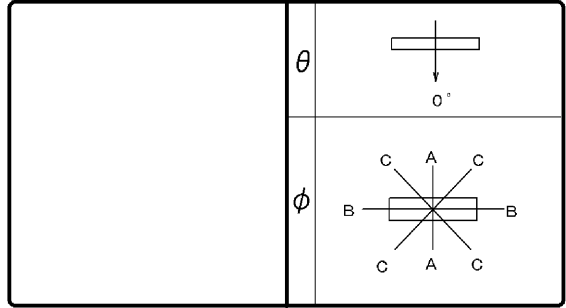

効率	F	6 %
	F	94 %
	F	100 %
	器具光束	1600 lm

保守率	良	0.88
	中	0.86
	否	0.81

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

東芝形名: LEKTW212164SN-LS9

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
$0^\circ$	300	300	300
$10^\circ$	296	295	295
$20^\circ$	284	279	281
$30^\circ$	263	253	257
$40^\circ$	234	218	225
$50^\circ$	198	177	186
$60^\circ$	158	131	143
$70^\circ$	118	80	99
$80^\circ$	81	30	58
$90^\circ$	51	1	30
$100^\circ$	29	1	14
$110^\circ$	17	1	9
$120^\circ$	12	1	7
$130^\circ$	10	1	8
$140^\circ$	9	1	8
$150^\circ$	9	1	2
$160^\circ$	1	1	1
$170^\circ$	1	1	1
$180^\circ$	1	1	1

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数		固有照明率 ( $\times 0.01$ )																						
0.60	60	55	46	43	37	36	58	54	45	43	36	35	43	41	35	34	34	34	29	27				
0.80	72	65	57	54	48	46	69	63	56	53	47	45	53	51	46	44	44	43	38	36				
1.00	79	71	65	60	55	52	76	69	63	59	54	51	60	57	52	50	50	49	44	41				
1.25	87	77	73	67	63	59	83	75	71	66	62	58	67	63	59	57	57	55	50	48				
1.50	92	81	79	71	69	64	88	79	76	70	68	63	72	67	64	61	62	60	55	52				
2.00	100	87	89	79	80	73	96	85	86	78	77	72	80	75	74	69	70	67	63	60				
2.50	105	90	95	84	86	78	100	88	91	82	84	76	85	79	79	74	75	72	68	65				
3.00	108	93	99	87	92	82	104	91	96	85	89	80	89	82	84	78	79	75	71	68				
4.00	113	96	106	91	99	87	108	94	102	90	96	86	94	86	90	83	84	80	77	74				
5.00	116	98	110	94	104	90	111	96	105	92	100	89	98	89	94	86	88	83	80	77				
10.00	122	102	119	100	115	98	117	100	114	98	111	96	105	95	102	93	95	90	87	84				

