

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LSS9MP/RP-4-46

効 率	F 	6 %
	F 	94 %
	F 	100 %
器具光束		5000 lm

保守率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

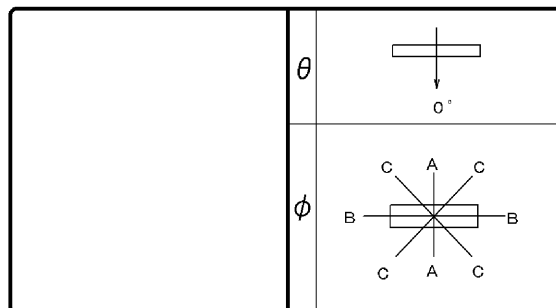

備 考	東芝形名:LEKTW412524SN-LS9
-----	------------------------

光度 (cd/1000lm)				反射率 (%)	天井		80						70						50						30		20	0																								
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0																											
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0																									
					固有照明率 (×0.01)																																															
0°	300	301	300	室指数	0.60																								60	55	46	43	37	36	58	54	45	43	36	35	43	41	35	34	34	29	27					
10°	296	295	295		0.80																								72	65	57	54	48	46	69	63	56	53	47	45	53	51	46	44	44	43	38	36				
20°	284	279	281		1.00																								79	71	65	60	55	52	76	69	63	59	54	51	60	57	52	50	50	49	44	41				
30°	263	253	257		1.25																								87	77	73	67	63	59	83	75	71	66	62	58	67	63	59	57	57	55	50	48				
40°	234	218	225		1.50																								92	81	79	71	69	64	88	79	76	70	68	63	72	67	64	61	62	60	55	52				
50°	198	177	186		2.00																								100	87	89	79	80	73	96	85	86	78	77	72	80	75	74	69	70	67	63	60				
60°	158	131	143		2.50																								105	90	95	84	86	78	100	88	91	82	84	76	85	79	79	74	75	72	68	65				
70°	118	80	99		3.00																								108	93	99	87	92	82	104	91	96	85	89	80	89	82	84	78	79	75	71	68				
80°	81	30	58		4.00																								113	96	106	91	99	87	108	94	102	90	96	86	94	86	90	83	84	80	77	74				
90°	51	1	30		5.00																								116	98	110	94	104	90	111	96	105	92	100	89	98	89	94	86	88	83	80	77				
100°	29	1	14		10.00																								122	102	119	100	115	98	117	100	114	98	111	96	105	95	102	93	95	90	87	84				
110°	17	1	9																																																	
120°	12	1	7																																																	
130°	10	1	8																																																	
140°	9	1	8																																																	
150°	9	1	2																																																	
160°	1	1	1																																																	
170°	1	1	1																																																	
180°	1	1	1																																																	

