

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEER-42501-LD9+LEEM-40404N-HG

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具光束	2650 lm

保守率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.23 H
B-B	1.23 H

前 面	カバー (乳白)
反射面	塗装 (白)

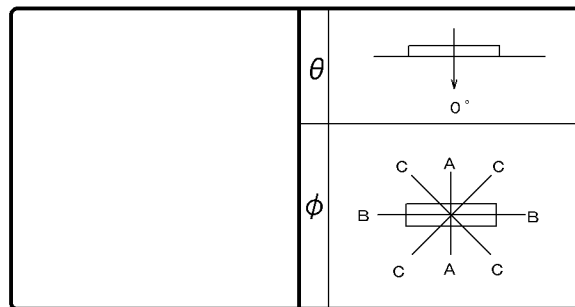

備 考	LEER-42501-LD9+LEEM-40404N-HG
-----	-------------------------------

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	399	399	399
10°	393	389	392
20°	372	367	369
30°	336	328	331
40°	282	273	280
50°	204	209	214
60°	117	141	136
70°	60	77	68
80°	22	27	24
90°	0	1	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数		固有照明率 (×0.01)																					
0.60		65	60	52	49	43	42	64	59	51	49	43	42	50	48	42	41	42	41	37	35		
0.80		78	71	65	61	56	54	76	70	63	60	55	53	61	59	54	53	53	52	48	46		
1.00		85	76	72	67	63	60	83	75	71	66	62	60	68	65	61	59	60	58	54	52		
1.25		93	82	80	74	71	67	90	81	79	73	70	67	75	71	68	66	67	65	61	59		
1.50		98	86	86	78	77	72	95	85	84	77	76	71	80	75	74	70	72	69	65	63		
2.00		106	92	96	85	88	80	102	90	93	84	86	79	89	82	83	78	80	77	73	71		
2.50		110	95	101	89	94	85	106	93	98	88	92	84	93	86	88	83	85	81	78	76		
3.00		113	97	106	92	99	88	109	96	103	91	97	88	97	89	92	86	88	85	81	80		
4.00		118	100	111	96	106	93	113	99	108	95	103	92	102	93	98	90	93	89	86	84		
5.00		120	102	115	99	110	96	116	100	111	97	107	95	105	95	101	93	96	91	89	87		
10.00		125	105	123	103	120	102	121	104	118	102	116	101	111	100	109	99	102	97	95	93		

