


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH8204B01-LC

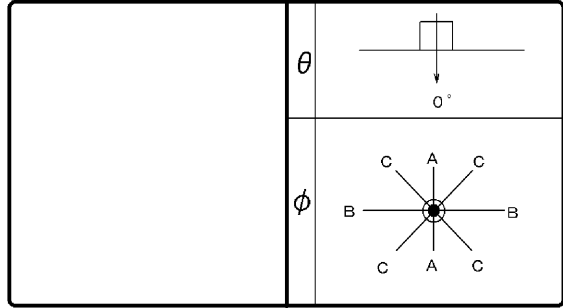

効 率	F	11 %
	F	89 %
	F	100 %
	器具 光束	5499 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	272	272	272
10°	268	269	269
20°	257	258	258
30°	239	240	239
40°	212	214	213
50°	179	181	179
60°	139	142	139
70°	95	97	95
80°	53	54	53
90°	25	24	24
100°	15	14	14
110°	15	15	15
120°	17	16	17
130°	18	18	18
140°	19	19	19
150°	19	20	20
160°	20	20	20
170°	22	22	23
180°	23	23	23

反 射 率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																							
0.60	59	54	45	42	36	35	57	52	43	41	35	34	41	39	34	33	32	32	27	25				
0.80	71	64	56	53	47	45	68	62	54	51	46	44	51	49	44	42	42	41	36	33				
1.00	78	70	63	59	54	51	74	67	61	57	52	50	58	55	50	48	48	46	41	38				
1.25	85	76	72	66	62	58	81	73	69	64	60	57	65	61	57	55	54	53	47	44				
1.50	90	80	77	70	68	63	86	77	75	69	66	62	69	65	62	59	59	57	52	49				
2.00	99	86	87	78	78	72	94	83	84	76	76	70	78	72	71	67	67	64	60	56				
2.50	103	89	93	82	85	77	98	87	90	80	82	75	83	76	77	72	72	69	64	61				
3.00	107	92	98	86	90	81	102	89	94	84	87	79	87	80	81	76	76	72	68	64				
4.00	112	95	104	90	98	86	106	92	100	88	94	84	92	84	87	81	81	77	73	69				
5.00	115	97	108	93	103	89	109	94	104	91	99	87	95	86	91	84	84	80	76	72				
10.00	121	101	117	99	114	97	115	99	112	97	109	95	102	92	100	90	92	87	83	79				

