

東芝照明器具配光データシート


名 称	LED照明器具
形 名	LEET75731+LEEM-S-70301N-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		3000 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔		
A-A	1.3	H
B-B	1.3	H

前 面	カバー（乳白）
反射面	白

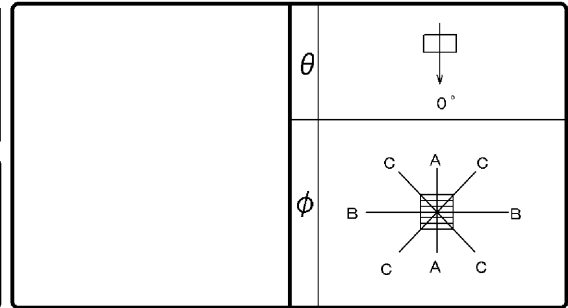

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	333	333	333
10°	327	328	328
20°	310	310	310
30°	281	281	282
40°	244	245	246
50°	201	202	203
60°	154	155	157
70°	106	106	111
80°	47	47	56
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30	20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	0
室指数	固有照明率 (×0.01)																					
0.60	62	57	47	45	38	37	60	55	46	44	38	37	45	43	37	37	37	36	32	30		
0.80	74	67	59	56	50	48	71	65	58	55	49	47	56	53	48	47	47	46	41	39		
1.00	81	73	67	62	57	54	78	71	65	61	56	54	63	59	55	53	54	52	47	45		
1.25	89	79	75	69	65	61	86	77	73	68	64	61	70	66	62	60	61	59	54	52		
1.50	94	83	81	74	72	66	91	81	79	73	70	66	75	71	68	65	66	64	59	57		
2.00	102	89	91	81	82	75	99	87	89	80	81	74	84	78	78	73	75	72	68	66		
2.50	107	92	97	86	89	80	103	91	94	85	87	80	89	83	83	78	80	77	73	71		
3.00	111	95	102	89	95	84	107	93	99	88	92	84	93	86	88	82	84	80	77	75		
4.00	115	98	108	94	102	90	111	97	105	93	99	89	99	90	94	87	90	86	82	80		
5.00	118	100	112	96	107	93	114	99	109	95	104	92	102	93	98	90	93	89	86	84		
10.00	125	104	121	102	118	100	120	103	117	101	114	99	109	99	107	97	101	95	93	91		

