


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH8202A01-LC

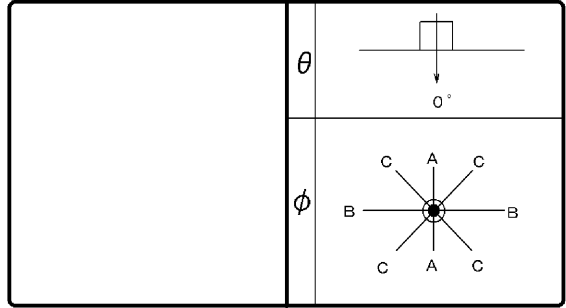

効 率	F	6 %
	F	94 %
	F	100 %
	器具 光束	5000 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	306	306	306
10°	302	302	302
20°	287	287	288
30°	262	263	263
40°	229	230	230
50°	188	190	190
60°	143	144	144
70°	95	97	97
80°	52	54	53
90°	24	25	25
100°	10	12	11
110°	7	8	8
120°	6	7	7
130°	6	7	6
140°	6	6	6
150°	6	6	6
160°	6	6	6
170°	6	7	7
180°	7	7	7

反 射 率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																							
0.60	60	56	46	44	37	36	58	54	45	43	37	36	43	41	36	35	35	34	30	28				
0.80	72	66	58	54	49	47	70	64	56	53	48	46	54	51	46	45	45	44	39	37				
1.00	79	71	65	61	56	53	76	69	64	59	55	52	60	57	53	51	51	49	45	42				
1.25	87	77	74	67	64	60	84	75	71	66	63	59	68	64	60	57	58	56	51	48				
1.50	92	81	79	72	70	65	88	79	77	71	68	64	73	68	65	62	62	60	56	53				
2.00	100	87	89	80	80	73	96	85	86	78	78	72	81	75	74	70	71	68	64	61				
2.50	105	91	95	84	87	78	101	89	92	82	84	77	86	79	80	75	76	73	68	66				
3.00	109	93	100	87	92	82	104	91	96	86	89	81	90	83	84	79	80	76	72	69				
4.00	114	97	106	92	100	88	109	94	102	90	96	86	95	87	90	84	85	81	77	74				
5.00	116	98	110	94	104	91	111	96	106	93	101	89	98	89	94	87	88	84	81	78				
10.00	123	102	119	100	116	98	117	101	114	99	111	97	105	95	103	93	96	91	88	85				

