

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH8103A01-LC

効 率	F 	3 %
	F 	97 %
	F 	100 %
器具光束		3800 lm

保守率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	カバー (乳白)
反射面	塗装 (白)

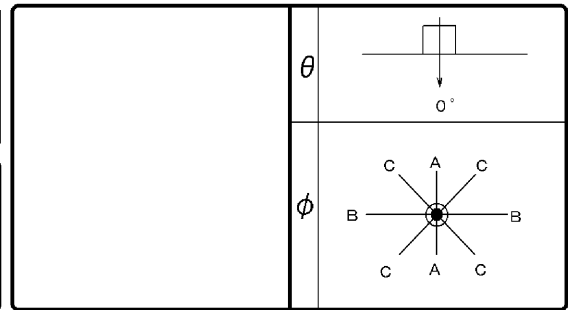

備考	
----	--

光度 (cd/1000lm)				反 射 率 (%)	天 井 壁 床	80						70						50						30			20	0						
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50			30			30			10	0
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
0°		320	319	319	室指数	固 有 照 明 率 (×0.01)																												
10°		316	314	315		0.60	61	56	47	44	38	37	59	55	46	44	37	36	44	42	37	36	36	35	31	29								
20°		299	297	298		0.80	73	66	59	55	49	47	71	65	57	54	48	47	55	52	47	46	46	45	40	38								
30°		273	269	271		1.00	80	72	66	61	56	53	77	70	64	60	55	53	61	58	54	52	52	51	46	44								
40°		238	234	236		1.25	88	78	74	68	65	61	85	76	72	67	63	60	69	65	61	58	59	57	52	50								
50°		196	192	194		1.50	93	82	80	73	71	66	89	80	78	71	69	65	74	69	66	63	64	62	57	55								
60°		150	145	147		2.00	101	88	90	80	81	74	97	86	87	79	79	73	82	76	76	71	72	70	65	63								
70°		101	97	99		2.50	106	91	96	85	88	79	102	89	93	83	85	78	87	81	81	76	77	74	70	68								
80°		55	51	54		3.00	110	94	101	88	93	83	105	92	97	87	91	82	91	84	86	80	81	78	74	71								
90°		19	18	22		4.00	114	97	107	93	101	88	110	95	103	91	98	87	96	88	92	85	87	83	79	77								
100°		10	10	9		5.00	117	99	111	95	105	92	112	97	107	94	102	90	100	91	96	88	90	86	83	80								
110°		6	6	5		10.00	123	103	120	101	116	99	118	101	115	99	112	98	107	97	105	95	98	92	90	87								
120°		4	4	3																														
130°		2	2	1																														
140°		1	1	1																														
150°		1	1	1																														
160°		1	1	1																														
170°		1	2	1																														
180°		2	2	1																														

